


# CITY OF FREMONT

## ALAMEDA COUNTY, CALIFORNIA

# DRINKING FOUNTAIN REPLACEMENT AND CONNECTION

## 8769 (PWC)

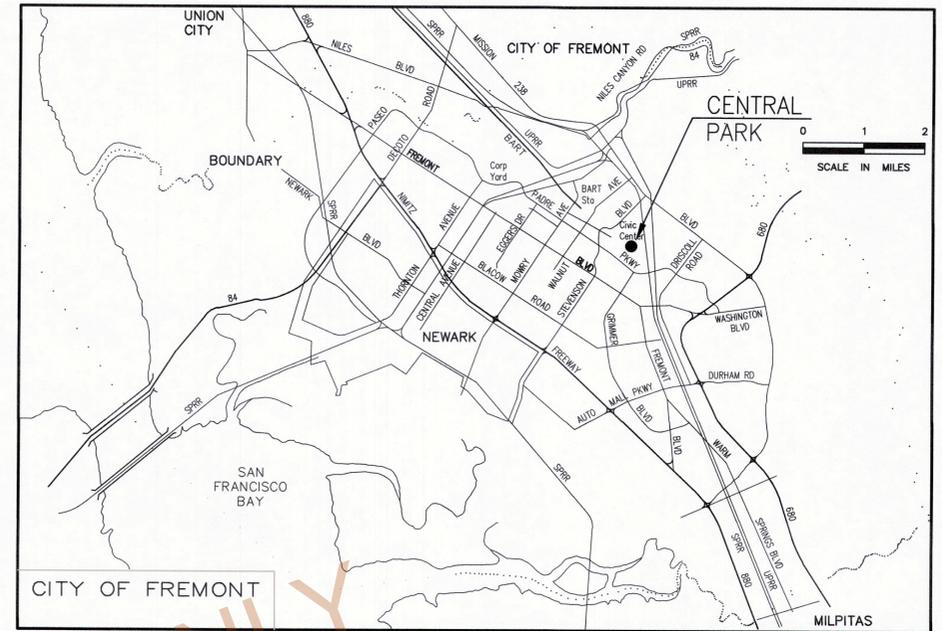

**PROJECT NOTES:**

- ALL WORK SHALL BE IN CONFORMANCE WITH THE PROJECT PLANS AND THESE PROJECT SPECIAL PROVISIONS.
- WHERE SPECIFIED, WORK SHALL BE IN CONFORMANCE WITH CALIFORNIA BUILDING CODE STANDARDS. REFER TO THE BUILDING PERMIT AND PROJECT SPECIFICATIONS FOR CLARITY ON BUILDING CODE SECTIONS THAT GOVERN WORK.
- ALL OTHER WORK SHALL BE IN CONFORMANCE WITH CALTRANS STANDARD SPECIFICATIONS, CURRENT EDITION, THESE PROJECT SPECIAL PROVISIONS AND THE CITY OF FREMONT STANDARD DETAILS AND SPECIFICATIONS.

**GENERAL NOTES:**

- AT LEAST TWO WORKING DAYS PRIOR TO CONSTRUCTION, THE CONTRACTOR SHALL CALL THE UNDERGROUND SERVICE ALERT FOR UTILITY LOCATIONS. PHONE: 1-800-227-2600.
- THE CONTRACTOR SHALL PROVIDE ALL LIGHTS, SIGNS, BARRICADES, FLAGMEN OR OTHER DEVICES NECESSARY TO PROVIDE FOR PUBLIC SAFETY.
- IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO COORDINATE ALL NECESSARY UTILITY RELOCATIONS WITH THE APPROPRIATE UTILITY COMPANY.
- REFER TO OTHER SHEETS FOR ADDITIONAL NOTES AND LEGENDS PERTAINING TO SPECIFIC ITEMS OF WORK.
- THE CONTRACTOR IS ENCOURAGED TO USE RECLAIMED WATER GENERATED BY UNION SANITARY DISTRICT (USD) FOR CONSTRUCTION ACTIVITIES. FOR FURTHER INFORMATION, CONTACT USD AT (510) 477-7500.
- LOCATION OF EXISTING FACILITIES WERE TAKEN PARTIALLY FROM RECORDS AND MAY BE INCOMPLETE. THE CONTRACTOR SHALL DETERMINE THE EXACT LOCATION OF ALL UTILITIES PRIOR TO ANY EXCAVATION OR TRENCHING IN THEIR LOCALITY. THE UTILITY AGENCIES IN THE CITY OF FREMONT ARE:

**ALAMEDA COUNTY WATER DISTRICT**    **TIME WARNER TELECOM**  
 43885 SOUTH GRIMMER BOULEVARD    1340 TREAT BLVD, SUITE 100  
 FREMONT, CA 94537    WALNUT CREEK, CA 94597  
 PHONE: (510) 659-1970    PHONE: (925) 953-7093

**UNION SANITARY DISTRICT (USD)**    **A T & T**  
 5072 BENSON ROAD    870 N. MCCARTHY ROAD,  
 UNION CITY, CA 94587-2508    CUBE 1.167  
 PHONE: (510) 477-7500    MILPITAS, CA 95035  
 PHONE: (408) 635-8831

**PACIFIC GAS & ELECTRIC CO.**    **COMCAST**  
 41800 BOSCELL ROAD    8470 PARDEE ROAD  
 FREMONT, CA 94538    OAKLAND, CA 94621  
 PHONE: (510) 683-3025    PHONE: (510) 567-9213

**XO COMMUNICATIONS**    **ALAMEDA COUNTY FLOOD CONTROL & WATER CONSERVATION DISTRICT**  
 855 MISSION COURT    399 ELMHURST STREET  
 FREMONT, CA 94539    HAYWARD, CA 94545  
 PHONE: (510) 580-6363    PHONE: (510) 670-5429 (PERMIT)

**CITY OF HAYWARD/HAYWARD WATER DISTRICT (HWD)**  
 777 B STREET  
 HAYWARD, CA 94541  
 PHONE: (510) 583-4719

**ABBREVIATIONS**

(ADDITIONAL ABBREVIATIONS MAY BE LOCATED ON SPECIFIC SHEETS)

AB/ASB	AGGREGATE BASE/SUBBASE	FG	FINISHED GRADE	QCV	QUICK COUPLER VALVE
AC	ASPHALT CONCRETE	FL	FLOWLINE	R	RADIUS
BC	BOTTOM OF CURB	FP	FENCE POST	RCP	REINFORCED CONCRETE PIPE
BLDG	BUILDING	FS	FINISHED SURFACE	ROW	RIGHT OF WAY
BM	BENCH MARK	FTF	FACE TO FACE	RT	RIGHT
BMP	BEST MANAGEMENT PRACTICES	GB	GRADE BREAK	RW	RETAINING WALL
BW	BOTTOM OF WALK	GM	GAS METER	SC	SAW CUT
BPU	BACKFLOW PREVENTER UNIT	GR	GRATE	SG	SUBGRADE/TOP OF SUBGRADE
BOW	BACK OF WALL	GND	GROUND	SD	STORM DRAIN
CB	CATCH BASIN	GV	GAS VALVE	SDMH	STORM DRAIN MANHOLE
CIP	CAST IN PLACE	HVCAB	HIGH VOLTAGE CABINET	SHR	SHRUB
CLF	CHAIN LINK	HW	HEADWALL	SL	STREET LIGHT/ELECTROLIER
CL	CENTERLINE	ICC	IRRIGATION CONTROL CABINET	SLPB	STREET LIGHT PULL BOX
CLR	CLEAR	INV	INVERT	SP	SPOT ELEVATIONS
CO	CLEANOUT	IRC	IRRIGATION REMOTE CONTROL VALVE	SS	SANITARY SEWER
CONC	CONCRETE	IRR	IRRIGATION SPRINKLER HEADS	SSMH	SANITARY SEWER MANHOLE SIDEWALK
CONF	CONFORM	LOW	LIMIT OF WORK	TB	TOP OF SLOPE
COTG	CLEANOUT TO GRADE	LT	LEFT	TC	TOP OF CURB
CP	CONCRETE PAD	MAX	MAXIMUM	TEMP	TEMPORARY
DG	DECOMPOSED GRANITE	MIN	MINIMUM	TG	TOP OF GRATE
DI	DRAINAGE INLET	MH	MANHOLE-UNKNOWN OWNER	T	TREE
DWY	DRIVEWAY	MON	MONUMENT	TRF	TRAFFIC
DWTC	DRIVEWAY TOP OF CURB	MOW	MOWSTRIP	TS	TOE OF SLOPE
(E)	EXISTING	(N)	NEW	TVB	TELEVISION/CABLE BOX
EM	ELECTRICAL METER	O.C.	ON CENTER	TW	TOP OF WALL
EP	EDGE OF PAVEMENT	PB/HH	PULLBOX / HAND HOLE	TYP	TYPICAL
EPB	ELECTRICAL PULL BOX	PCC	PORTLAND CEMENT CONCRETE	VLT	VAULT
EQ	EQUAL	PLTR	PLANTER	WM	WATER METER
EW	EDGE OF WALK	PP	POWER POLE	WV	WATER VALVE
FCE	FENCE				

**APPLICATION CODES AND REGULATIONS**

CALIFORNIA BUILDING CODE (CBC) AND CITY OF FREMONT ORDINANCE NUMBERS:

- CALIFORNIA FIRE CODE 2019 EDITION
- CALIFORNIA BUILDING CODE 2019 EDITION
- CALIFORNIA PLUMBING CODE 2019 EDITION
- CALIFORNIA ELECTRIC CODE 2019 EDITION
- CALIFORNIA GREEN BUILDING STANDARDS 2019 EDITION
- ENERGY EFFICIENT STANDARDS 2019 EDITION
- CITY OF FREMONT LOCAL BUILDING ORDINANCE #21-2016
- CITY OF FREMONT LOCAL FIRE ORDINANCE #20-2016



SCHEDULE OF DRAWINGS		
SHEET NO.	SHEET TITLE	DESCRIPTION
1	L0.0	COVER SHEET
2	L0.1	PROJECT LOCATION MAP AND STAGING
3	L1.0	CENTRAL PARK - KENNEDY RESTROOM
4	L2.0	CENTRAL PARK - KENNEDY PLAYGROUND
5	L3.0	CENTRAL PARK - MAMMOTH PICNIC AREA
6	L4.0	CENTRAL PARK - PICNIC AREA A
7	L5.0	CENTRAL PARK - PICNIC AREA D
8	L6.0	CENTRAL PARK - BABBLING BROOK RESTROOM
9	L7.0	CENTRAL PARK - REDWOOD PICNIC AREA
10	L8.0	CENTRAL PARK - LIONS PICNIC AREA
11	L9.0	CENTRAL PARK - PICNIC AREA B
12	L10.0	CENTRAL PARK - PICNIC AREA B (ALTERNATE #1)
13	L11.0	CENTRAL PARK - BOAT HOUSE
14	L12.0	CENTRAL PARK - TENNIS COURT RESTROOM
15	L13.0	CENTRAL PARK - SOCCER FIELD 1 RESTROOM
16	L14.0	CONSTRUCTION DETAILS
17	L14.1	CONSTRUCTION DETAILS
18	L14.2	CONSTRUCTION DETAILS

*Khandan Bahmani* 11/26/2019  
 APPROVED --- KHANDAN BAHMANI, CITY ENGINEER    DATE

*J. Barajas* 11-26-19  
 REVIEWED --- JUAN BARAJAS, PARKS SUPERINTENDENT    DATE

No.	DATE	REVISION	BY	APPD

**CITY OF FREMONT**

APPROVED - SENIOR LANDSCAPE ARCHITECT  
*Mark Alvarado*

**DRINKING FOUNTAIN REPLACEMENT AND CONNECTION**

**COVER SHEET**

**PUBLIC WORKS DEPARTMENT**

CITY PROJECT: PWC 8769

FEDERAL PROJECT:

DESIGNED BY: EL    CHECKED BY: MM

DRAWN BY: EL    DATE: 11/19/2019

DATE: 11-26-2019    RECOMMENDED - PROJECT MANAGER: *[Signature]*    DATE: 11-26-19

SCALE: 0 1 2"    NOTE: VERIFY SCALE. BAR IS ONE INCH ON ORIGINAL DRAWING. ADJUST SCALES ACCORDINGLY IF BAR IS NOT ONE INCH.

**L0.0**

SHEET 1 OF 18

SOCCER FIELD #1 RESTROOM  
L13.0

TENNIS COURT RESTROOM  
L12.0

POTENTIAL STAGING AREA

PICNIC AREA D  
L5.0

BOAT HOUSE  
L11.0

LIONS PICNIC AREA  
L8.0

PICNIC AREA B  
L9.0/L10.0

BABBLING BROOK  
RESTROOM  
L6.0


REDWOOD PICNIC AREA  
L7.0

KENNEDY PLAYGROUND  
L2.0

KENNEDY RESTROOM  
L1.0

MAMMOTH PICNIC AREA  
L3.0

PICNIC AREA A  
L4.0

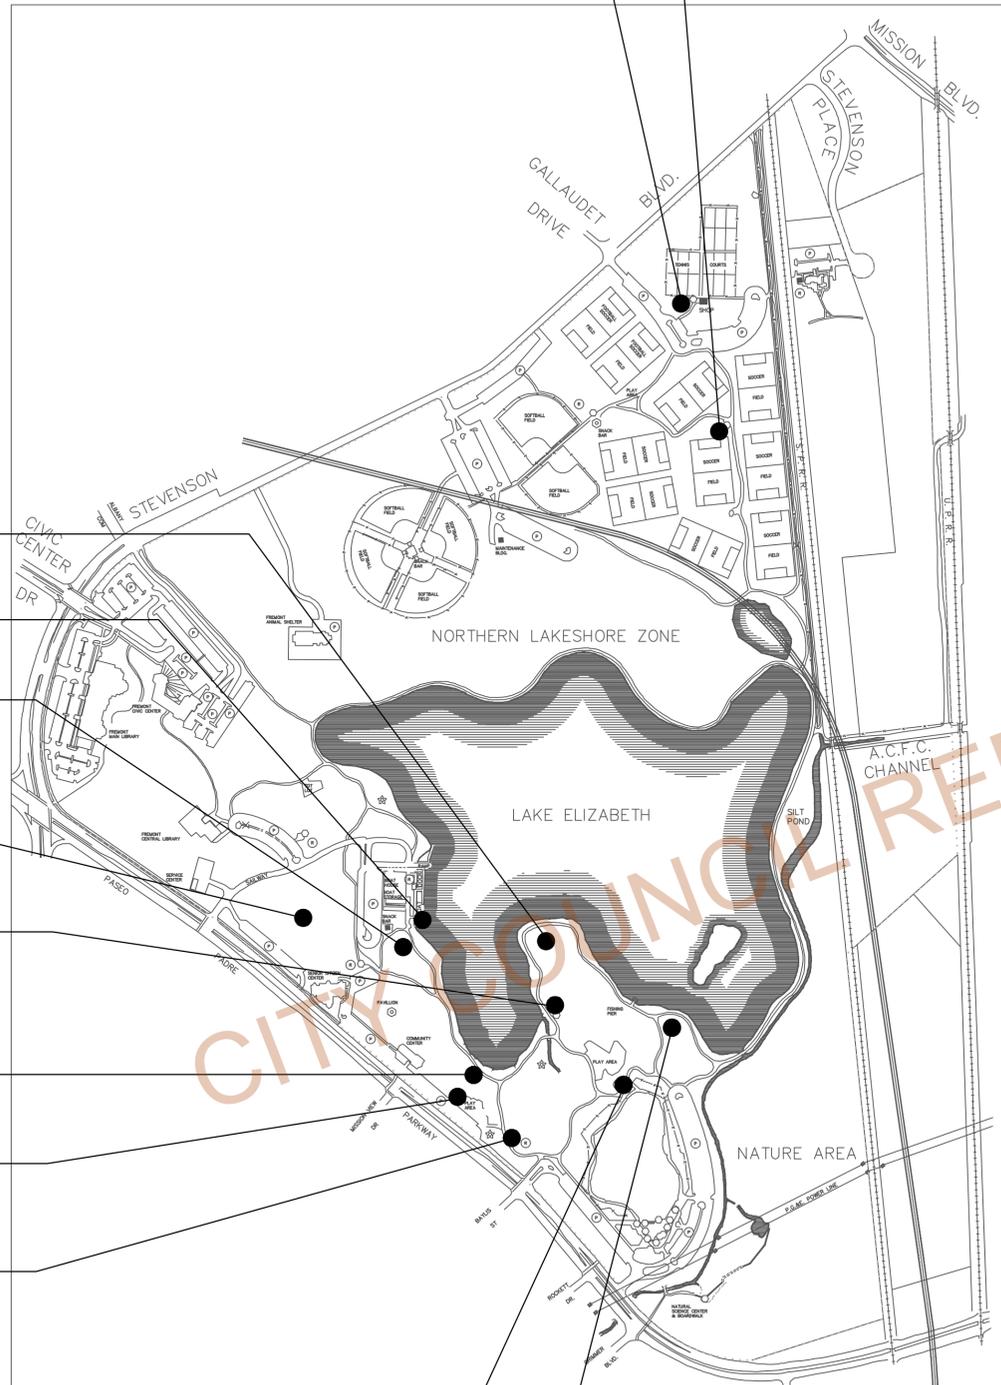

**STAGING NOTES:**

- POTENTIAL STAGING AREA SHALL BE 6 TO 8 PARKING STALLS TO BE USED FOR STORAGE OF ALL CONTRACTOR EQUIPMENT AND FURNISHED MATERIALS.
- STAGING AREA, AS DELINEATED, ARE APPROXIMATE IN SIZE AND LOCATION. CONTRACTOR SHALL PROVIDE A STAGING PLAN, WHICH IDENTIFIES THE DESIRED LOCATION AND SIZE OF THE AREA.
- PRIOR TO VEHICULAR AND EQUIPMENT ACCESS INTO THE SITE, THE CONTRACTOR SHALL PROTECT THE EXISTING SURFACES FROM DAMAGE. THE NEED FOR PROTECTIVE SHEETING OR PLATING TO PROTECT THESE SURFACES SHALL BE PAID FOR IN ALL THE VARIOUS BID ITEMS.
- CONTRACTOR SHALL MAINTAIN INGRESS AND EGRESS TO THE EXISTING PARKING LOT AT ALL TIMES DURING CONSTRUCTION.

No.	DATE	REVISION	BY	APPD
△				
△				
△				
△				




DRINKING FOUNTAIN REPLACEMENT AND CONNECTION

PROJECT LOCATION MAP AND STAGING  
PUBLIC WORKS DEPARTMENT


DATE 11-26-2019 RECOMMENDED -- PROJECT MANAGER DATE 11-26-2019

CITY PROJECT: PWC 8769	SCALE: N.T.S.	DRAWING:
FEDERAL PROJECT:	0  -----  1'	<b>L0.1</b>
DESIGNED BY: EL	CHECKED BY: MM	
DRAWN BY: EL	DATE: 11-26-2019	

NOTE: VERIFY SCALE. BAR IS ONE INCH ON ORIGINAL DRAWING. ADJUST SCALES ACCORDINGLY IF BAR IS NOT ONE INCH.

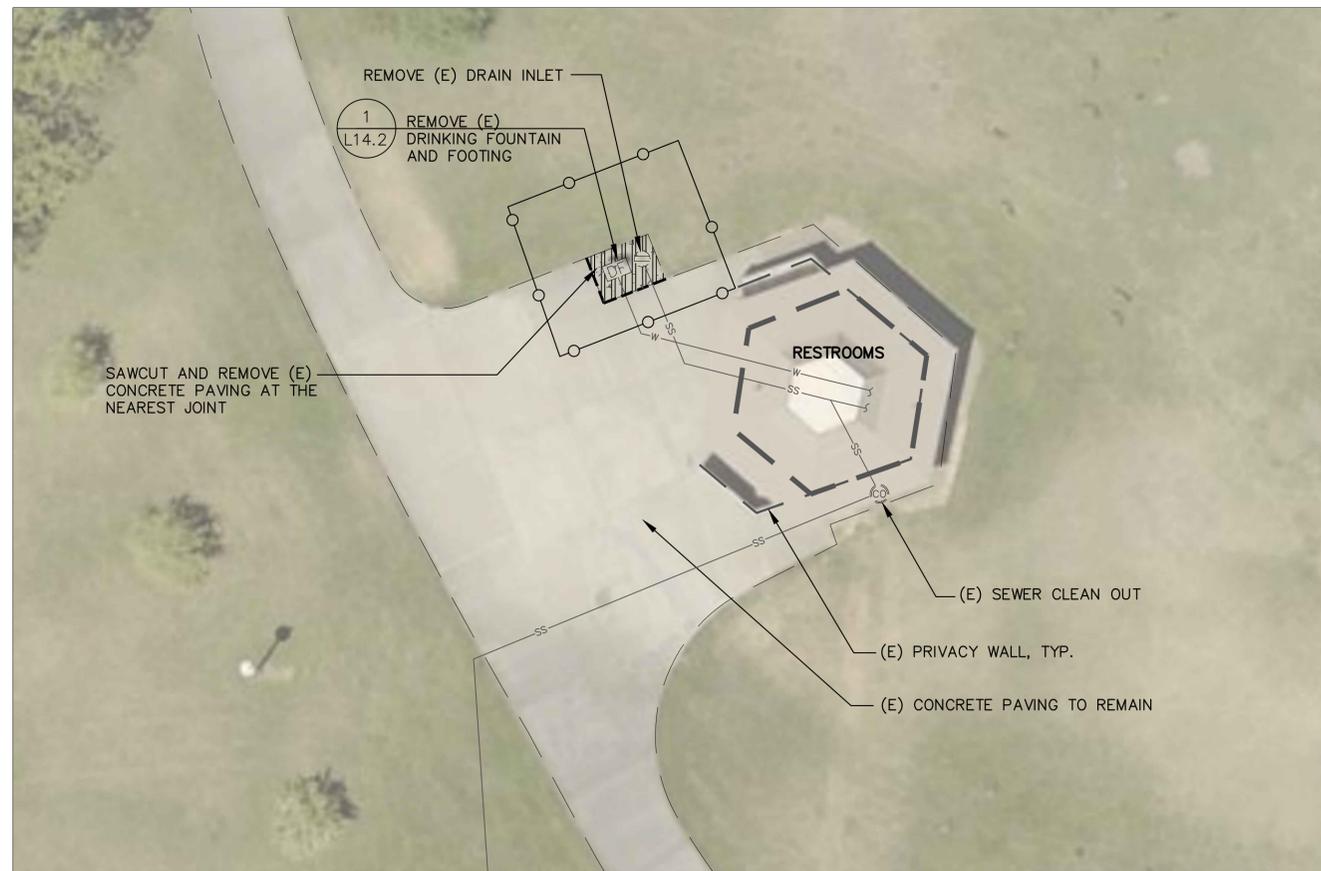

EXISTING CONDITIONS/DEMOLITION PLAN

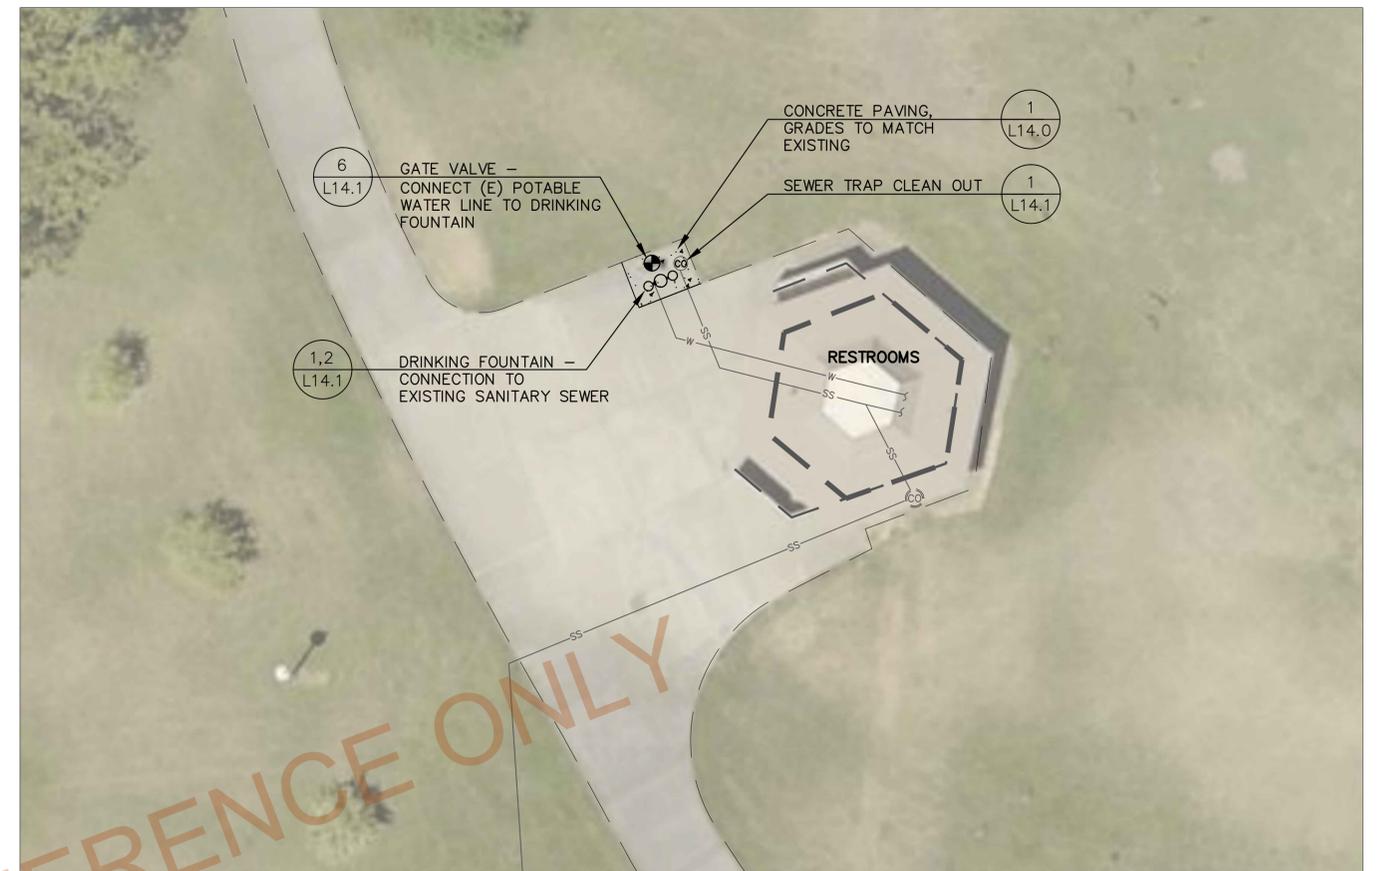

IMPROVEMENT PLAN

LEGEND:

	TEMPORARY CONSTRUCTION FENCING
	REMOVE CONCRETE AND ASPHALT PAVING TO SUBGRADE
	(E) DRINKING FOUNTAIN
	(E) SANITARY SEWER CLEAN OUT
	(E) GATE VALVE
	(E) DRAIN INLET
	(E) SANITARY SEWER
	(E) POTABLE WATER
	(E) PVC DRAIN LINE
	(N) PERFORATED PVC PIPE
	(N) DRINKING FOUNTAIN
	(N) GATE VALVE
	(N) CLEAN OUT
	(N) CONCRETE PAVING

NOTES:

1. THE CONTRACTOR SHALL VERIFY THAT EXISTING CONDITIONS ARE AS INDICATED ON THE DRAWINGS. NOTIFY THE CITY REPRESENTATIVE OF VARIATIONS OR DISCREPANCIES. DO NOT PROCEED WITH AFFECTED WORK UNTIL THE VARIATIONS OR DISCREPANCIES ARE RESOLVED.
2. THE CONTRACTOR SHALL PERFORM ALL CLEARING, DEMOLITION, REMOVAL OF OBSTRUCTIONS AND SITE PREPARATION NECESSARY FOR THE PROPER EXECUTION OF ALL WORK CONTAINED IN THE CONTRACT DOCUMENTS.
3. THE CONTRACTOR SHALL VERIFY LOCATION OF ALL EXISTING UTILITIES AND PROVIDE THE REQUIRED COORDINATION FOR THEIR TEMPORARY DISCONNECTION, PROTECTION, AND REMOVAL AS MAY BE REQUIRED DURING CONSTRUCTION. CONTRACTOR SHALL COORDINATE WITH THE CITY TO DETERMINE WHETHER TEMPORARY SERVICES ARE NECESSARY. THE CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL EXISTING UTILITIES, STRUCTURES AND SERVICES BEFORE COMMENCING WORK. THE LOCATIONS AND ALIGNMENTS OF EXISTING UTILITIES, STRUCTURES AND SERVICES SHOWN ON THE DRAWINGS SHALL BE DEEMED TO BE APPROXIMATION ONLY. THE CONTRACTOR SHALL VERIFY THE LOCATIONS AND DEPTH OF UTILITIES THROUGH UNDERGROUND SERVICE ALERT (USA), POTHOLING OR OTHER METHODS. ALL DISCREPANCIES BETWEEN WHAT IS SHOWN AND THE ACTUAL FIELD CONDITIONS SHALL BE REPORTED TO THE CITY REPRESENTATIVE.
4. ALL REFERENCE MARKINGS MADE BY THE CONTRACTOR SHALL BE DONE WITH SPRAY CHALK, AND SHALL BE REMOVED BY THE CONTRACTOR WHEN NO LONGER NEEDED.
5. ALL EXISTING FEATURES ARE TO REMAIN UNLESS OTHERWISE NOTED. THE CONTRACTOR SHALL BE RESPONSIBLE FOR REPAIRING OR REPLACING, AT THE CONTRACTOR'S EXPENSE, ANY EXISTING ITEM DAMAGED OR DESTROYED BY CONSTRUCTION OPERATIONS. CONTRACTOR SHALL BE RESPONSIBLE FOR REPAIRING OR REPLACING ANY AND ALL DAMAGES TO ADJACENT PROPERTIES. THE DAMAGED ITEMS SHALL BE RESTORED TO AN "AS-WAS" OR BETTER CONDITION OR REPLACED PER THE DISCRETION OF THE CITY REPRESENTATIVE.
6. NO MATERIALS OR EQUIPMENT SHALL BE STORED WITHIN THE CANOPY DRIPLINE OF EXISTING TREES.
7. ALL EXISTING TREES, LAWN AND OTHER PLANTING LOCATED OUTSIDE THE LIMIT OR WORK AREA SHALL BE PRESERVED, AND REMAIN AND BE PROTECTED.

No.	DATE	REVISION	BY	APPD
△				
△				
△				
△				



DRINKING FOUNTAIN REPLACEMENT AND CONNECTION

CENTRAL PARK - KENNEDY RESTROOM  
PUBLIC WORKS DEPARTMENT


APPROVED -- SENIOR LANDSCAPE ARCHITECT	DATE 11-26-2019	RECOMMENDED -- PROJECT MANAGER	DATE 11-26-2019
--	-----------------	--------------------------------	-----------------

CITY PROJECT: PWC 8769	
FEDERAL PROJECT:	
DESIGNED BY: EL	CHECKED BY: MM
DRAWN BY: EL	DATE: 11-26-2019


SCALE: 1"=10'-0"
0  -----  1'
NOTE: VERIFY SCALE. BAR IS ONE INCH ON ORIGINAL DRAWING. ADJUST SCALES ACCORDINGLY IF BAR IS NOT ONE INCH.

DRAWING: <b>L1.0</b>
SHEET 3 OF 18



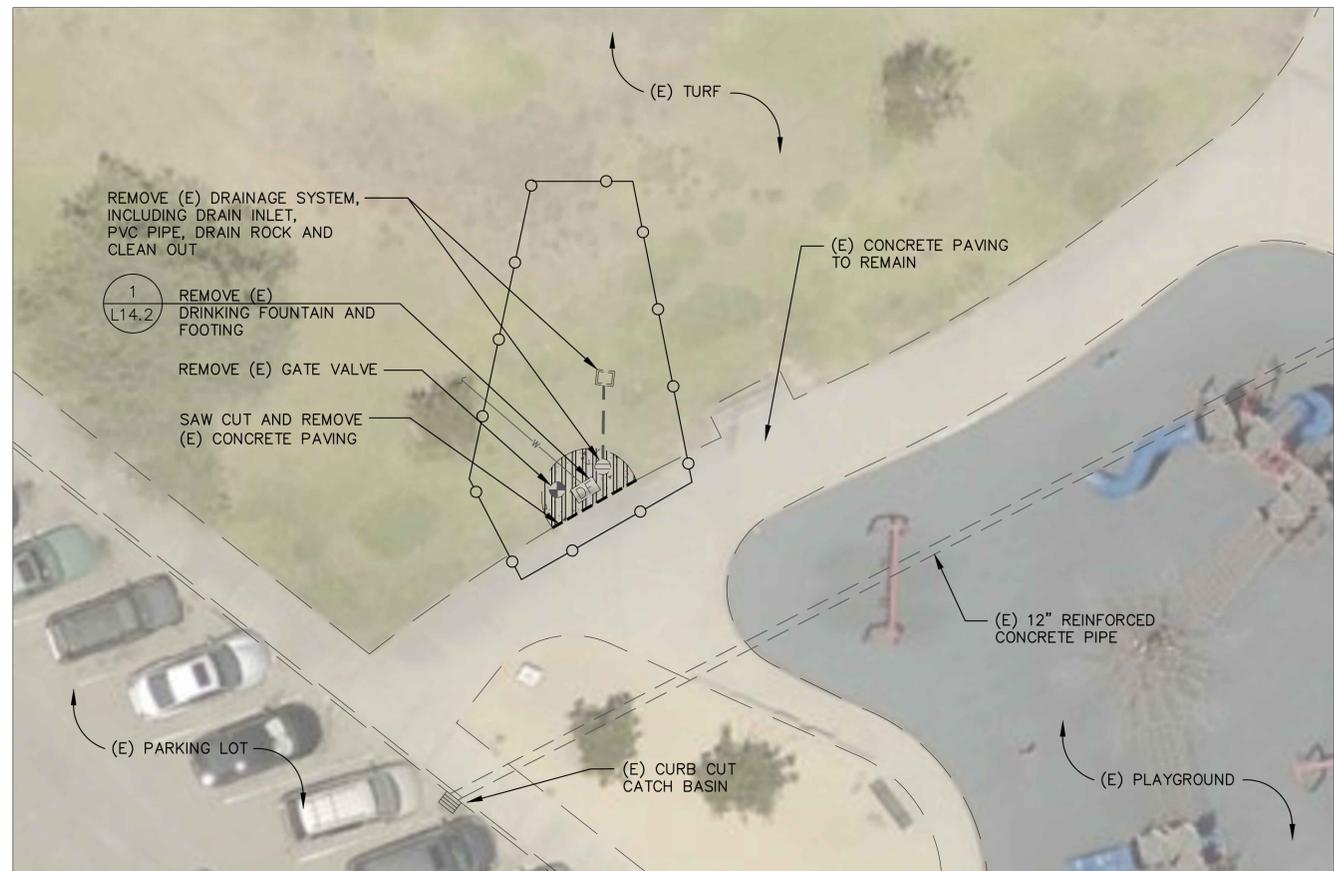

EXISTING CONDITION/DEMOLITION PLAN

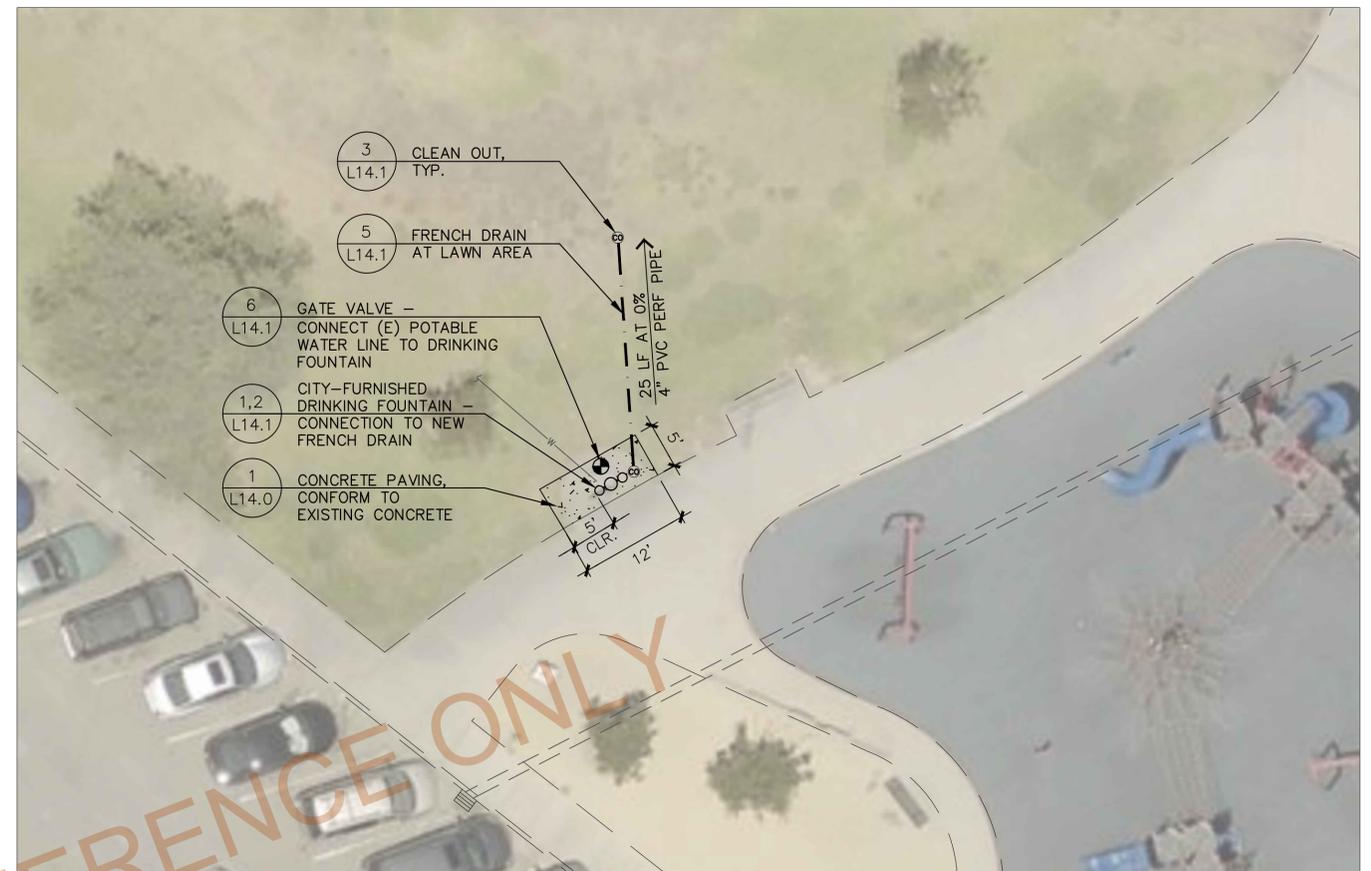

IMPROVEMENT PLAN

LEGEND:

	TEMPORARY CONSTRUCTION FENCING
	REMOVE CONCRETE AND ASPHALT PAVING TO SUBGRADE
	(E) DRINKING FOUNTAIN
	(E) SANITARY SEWER CLEAN OUT
	(E) GATE VALVE
	(E) DRAIN INLET
	(E) SANITARY SEWER
	(E) POTABLE WATER
	(E) PVC DRAIN LINE
	(N) PERFORATED PVC PIPE
	(N) DRINKING FOUNTAIN
	(N) GATE VALVE
	(N) CLEAN OUT
	(N) CONCRETE PAVING

NOTES:

1. THE CONTRACTOR SHALL VERIFY THAT EXISTING CONDITIONS ARE AS INDICATED ON THE DRAWINGS. NOTIFY THE CITY REPRESENTATIVE OF VARIATIONS OR DISCREPANCIES. DO NOT PROCEED WITH AFFECTED WORK UNTIL THE VARIATIONS OR DISCREPANCIES ARE RESOLVED.
2. THE CONTRACTOR SHALL PERFORM ALL CLEARING, DEMOLITION, REMOVAL OF OBSTRUCTIONS AND SITE PREPARATION NECESSARY FOR THE PROPER EXECUTION OF ALL WORK CONTAINED IN THE CONTRACT DOCUMENTS.
3. THE CONTRACTOR SHALL VERIFY LOCATION OF ALL EXISTING UTILITIES AND PROVIDE THE REQUIRED COORDINATION FOR THEIR TEMPORARY DISCONNECTION, PROTECTION, AND REMOVAL AS MAY BE REQUIRED DURING CONSTRUCTION. CONTRACTOR SHALL COORDINATE WITH THE CITY TO DETERMINE WHETHER TEMPORARY SERVICES ARE NECESSARY. THE CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL EXISTING UTILITIES, STRUCTURES AND SERVICES BEFORE COMMENCING WORK. THE LOCATIONS AND ALIGNMENTS OF EXISTING UTILITIES, STRUCTURES AND SERVICES SHOWN ON THE DRAWINGS SHALL BE DEEMED TO BE APPROXIMATION ONLY. THE CONTRACTOR SHALL VERIFY THE LOCATIONS AND DEPTH OF UTILITIES THROUGH UNDERGROUND SERVICE ALERT (USA), POTHOLES OR OTHER METHODS. ALL DISCREPANCIES BETWEEN WHAT IS SHOWN AND THE ACTUAL FIELD CONDITIONS SHALL BE REPORTED TO THE CITY REPRESENTATIVE.
4. ALL REFERENCE MARKINGS MADE BY THE CONTRACTOR SHALL BE DONE WITH SPRAY CHALK, AND SHALL BE REMOVED BY THE CONTRACTOR WHEN NO LONGER NEEDED.
5. ALL EXISTING FEATURES ARE TO REMAIN UNLESS OTHERWISE NOTED. THE CONTRACTOR SHALL BE RESPONSIBLE FOR REPAIRING OR REPLACING, AT THE CONTRACTOR'S EXPENSE, ANY EXISTING ITEM DAMAGED OR DESTROYED BY CONSTRUCTION OPERATIONS. CONTRACTOR SHALL BE RESPONSIBLE FOR REPAIRING OR REPLACING ANY AND ALL DAMAGES TO ADJACENT PROPERTIES. THE DAMAGED ITEMS SHALL BE RESTORED TO AN "AS-WAS" OR BETTER CONDITION OR REPLACED PER THE DISCRETION OF THE CITY REPRESENTATIVE.
6. NO MATERIALS OR EQUIPMENT SHALL BE STORED WITHIN THE CANOPY DRIPLINE OF EXISTING TREES.
7. ALL EXISTING TREES, LAWN AND OTHER PLANTING LOCATED OUTSIDE THE LIMIT OR WORK AREA SHALL BE PRESERVED, AND REMAIN AND BE PROTECTED.

No.	DATE	REVISION	BY	APPD
△				
△				
△				
△				




**CITY OF Fremont**  
 APPROVED -- SENIOR LANDSCAPE ARCHITECT  
*Mark Mc...*

DRINKING FOUNTAIN REPLACEMENT AND CONNECTION


CENTRAL PARK - KENNEDY PLAYGROUND  
 PUBLIC WORKS DEPARTMENT

DATE	RECOMMENDED -- PROJECT MANAGER	DATE
11-26-2019	<i>Shabo</i>	11-26-2019

CITY PROJECT:	PWC 8769	SCALE:	1"=10'-0"	DRAWING:	<b>L2.0</b>
FEDERAL PROJECT:		0  -----  1'	NOTE: VERIFY SCALE. BAR IS ONE INCH ON ORIGINAL DRAWING. ADJUST SCALES ACCORDINGLY IF BAR IS NOT ONE INCH.		
DESIGNED BY:	EL	CHECKED BY:	MM	SHEET 4 OF 18	
DRAWN BY:	EL	DATE:	11-26-2019		

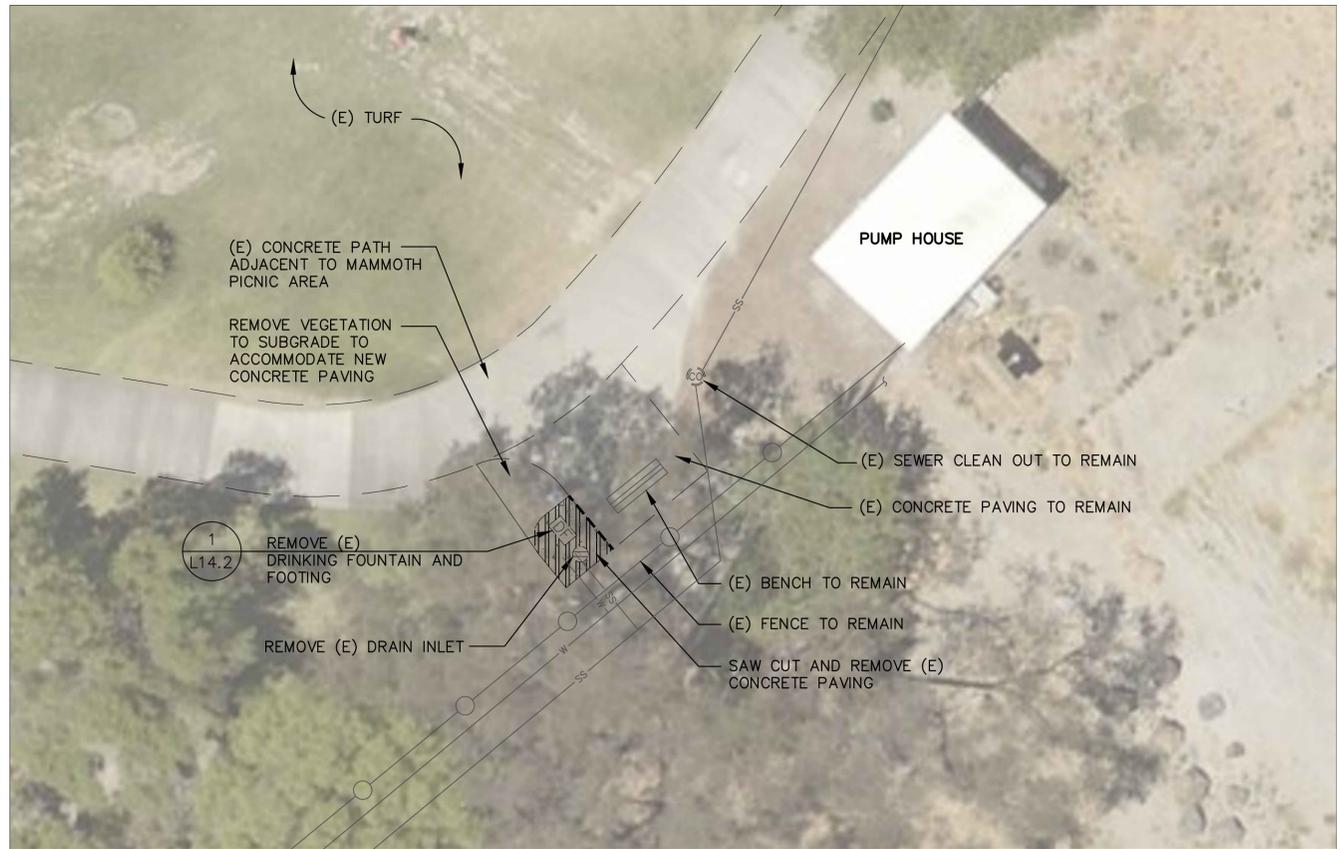

EXISTING CONDITION/DEMOLITION PLAN

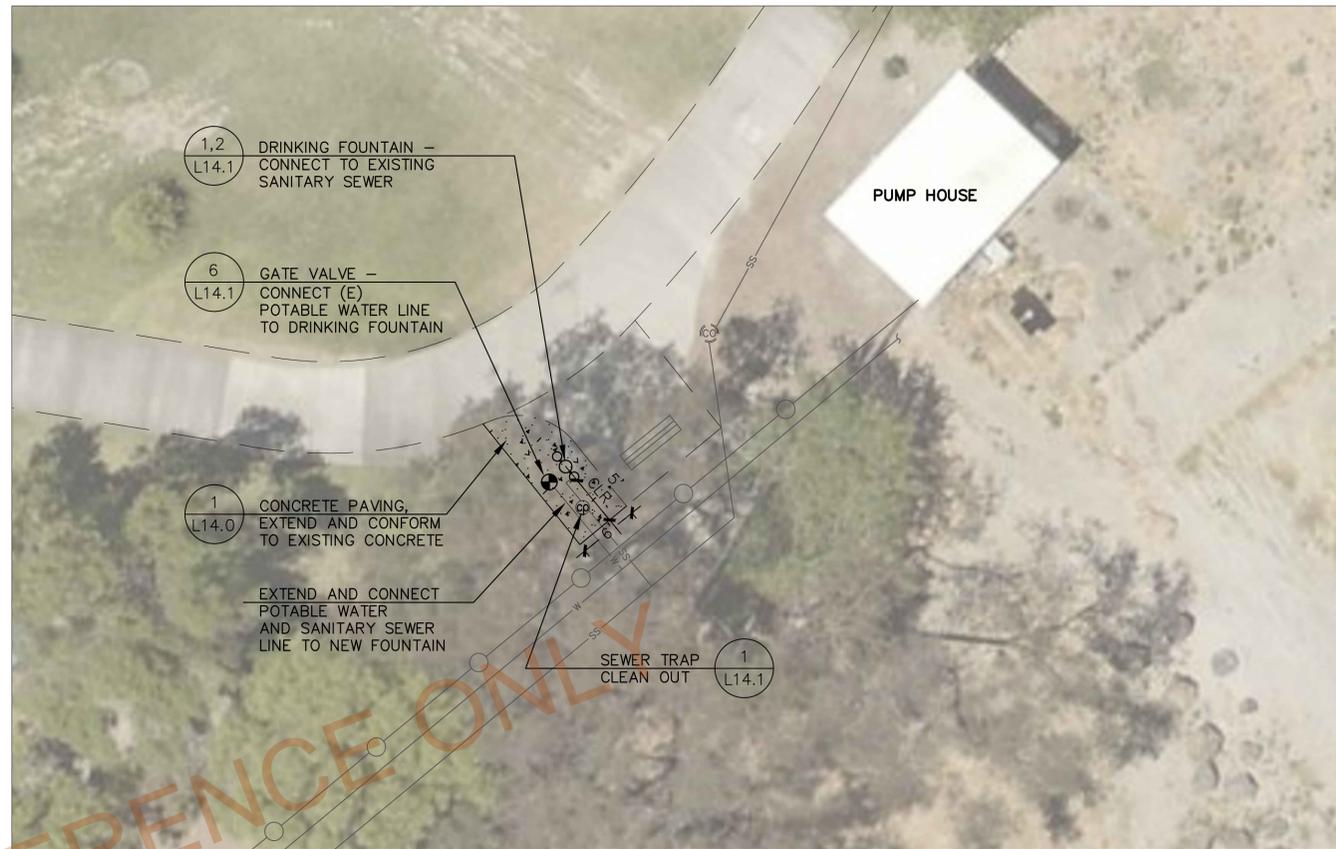

IMPROVEMENT PLAN

LEGEND:

	TEMPORARY CONSTRUCTION FENCING
	REMOVE CONCRETE AND ASPHALT PAVING TO SUBGRADE
	(E) DRINKING FOUNTAIN
	(E) SANITARY SEWER CLEAN OUT
	(E) GATE VALVE
	(E) DRAIN INLET
	(E) SANITARY SEWER
	(E) POTABLE WATER
	(E) PVC DRAIN LINE
	(N) PERFORATED PVC PIPE
	(N) DRINKING FOUNTAIN
	(N) GATE VALVE
	(N) CLEAN OUT
	(N) CONCRETE PAVING

NOTES:

1. THE CONTRACTOR SHALL VERIFY THAT EXISTING CONDITIONS ARE AS INDICATED ON THE DRAWINGS. NOTIFY THE CITY REPRESENTATIVE OF VARIATIONS OR DISCREPANCIES. DO NOT PROCEED WITH AFFECTED WORK UNTIL THE VARIATIONS OR DISCREPANCIES ARE RESOLVED.
2. THE CONTRACTOR SHALL PERFORM ALL CLEARING, DEMOLITION, REMOVAL OF OBSTRUCTIONS AND SITE PREPARATION NECESSARY FOR THE PROPER EXECUTION OF ALL WORK CONTAINED IN THE CONTRACT DOCUMENTS.
3. THE CONTRACTOR SHALL VERIFY LOCATION OF ALL EXISTING UTILITIES AND PROVIDE THE REQUIRED COORDINATION FOR THEIR TEMPORARY DISCONNECTION, PROTECTION, AND REMOVAL AS MAY BE REQUIRED DURING CONSTRUCTION. CONTRACTOR SHALL COORDINATE WITH THE CITY TO DETERMINE WHETHER TEMPORARY SERVICES ARE NECESSARY. THE CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL EXISTING UTILITIES, STRUCTURES AND SERVICES BEFORE COMMENCING WORK. THE LOCATIONS AND ALIGNMENTS OF EXISTING UTILITIES, STRUCTURES AND SERVICES SHOWN ON THE DRAWINGS SHALL BE DEEMED TO BE APPROXIMATION ONLY. THE CONTRACTOR SHALL VERIFY THE LOCATIONS AND DEPTH OF UTILITIES THROUGH UNDERGROUND SERVICE ALERT (USA), POTHOLES OR OTHER METHODS. ALL DISCREPANCIES BETWEEN WHAT IS SHOWN AND THE ACTUAL FIELD CONDITIONS SHALL BE REPORTED TO THE CITY REPRESENTATIVE.
4. ALL REFERENCE MARKINGS MADE BY THE CONTRACTOR SHALL BE DONE WITH SPRAY CHALK, AND SHALL BE REMOVED BY THE CONTRACTOR WHEN NO LONGER NEEDED.
5. ALL EXISTING FEATURES ARE TO REMAIN UNLESS OTHERWISE NOTED. THE CONTRACTOR SHALL BE RESPONSIBLE FOR REPAIRING OR REPLACING, AT THE CONTRACTOR'S EXPENSE, ANY EXISTING ITEM DAMAGED OR DESTROYED BY CONSTRUCTION OPERATIONS. CONTRACTOR SHALL BE RESPONSIBLE FOR REPAIRING OR REPLACING ANY AND ALL DAMAGES TO ADJACENT PROPERTIES. THE DAMAGED ITEMS SHALL BE RESTORED TO AN "AS-WAS" OR BETTER CONDITION OR REPLACED PER THE DISCRETION OF THE CITY REPRESENTATIVE.
6. NO MATERIALS OR EQUIPMENT SHALL BE STORED WITHIN THE CANOPY DRIPLINE OF EXISTING TREES.
7. ALL EXISTING TREES, LAWN AND OTHER PLANTING LOCATED OUTSIDE THE LIMIT OR WORK AREA SHALL BE PRESERVED, AND REMAIN AND BE PROTECTED.

No.	DATE	REVISION	BY	APPD
△				
△				
△				
△				



DRINKING FOUNTAIN REPLACEMENT AND CONNECTION

CENTRAL PARK - MAMMOTH PICNIC AREA  
PUBLIC WORKS DEPARTMENT

APPROVED -- SENIOR LANDSCAPE ARCHITECT

DATE 11-26-2019

RECOMMENDED -- PROJECT MANAGER

DATE 11-26-2019

CITY PROJECT: PWC 8769	
FEDERAL PROJECT:	
DESIGNED BY: EL	CHECKED BY: MM
DRAWN BY: EL	DATE: 11-26-2019


SCALE: 1"=10'-0"
0 1 1' 1'
NOTE: VERIFY SCALE. BAR IS ONE INCH ON ORIGINAL DRAWING. ADJUST SCALES ACCORDINGLY IF BAR IS NOT ONE INCH.

DRAWING: <b>L3.0</b>
SHEET 5 OF 18





EXISTING CONDITIONS/DEMOLITION PLAN

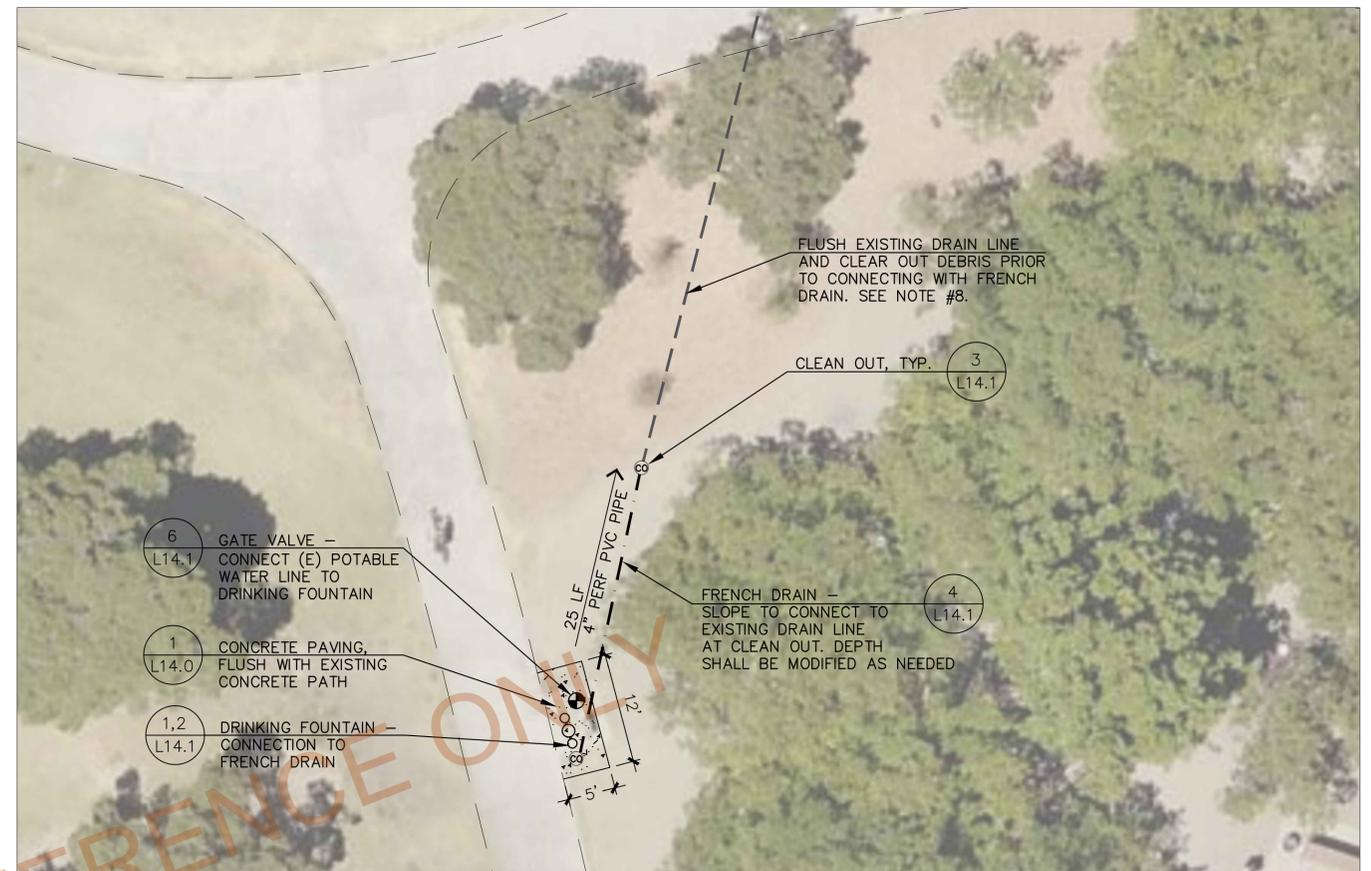

IMPROVEMENT PLAN

LEGEND:

	TEMPORARY CONSTRUCTION FENCING
	REMOVE CONCRETE AND ASPHALT PAVING TO SUBGRADE
	(E) DRINKING FOUNTAIN
	(E) SANITARY SEWER CLEAN OUT
	(E) GATE VALVE
	(E) DRAIN INLET
	(E) SANITARY SEWER
	(E) POTABLE WATER
	(E) PVC DRAIN LINE
	(N) PERFORATED PVC PIPE
	(N) DRINKING FOUNTAIN
	(N) GATE VALVE
	(N) CLEAN OUT
	(N) CONCRETE PAVING

NOTES:

1. THE CONTRACTOR SHALL VERIFY THAT EXISTING CONDITIONS ARE AS INDICATED ON THE DRAWINGS. NOTIFY THE CITY REPRESENTATIVE OF VARIATIONS OR DISCREPANCIES. DO NOT PROCEED WITH AFFECTED WORK UNTIL THE VARIATIONS OR DISCREPANCIES ARE RESOLVED.
2. THE CONTRACTOR SHALL PERFORM ALL CLEARING, DEMOLITION, REMOVAL OF OBSTRUCTIONS AND SITE PREPARATION NECESSARY FOR THE PROPER EXECUTION OF ALL WORK CONTAINED IN THE CONTRACT DOCUMENTS.
3. THE CONTRACTOR SHALL VERIFY LOCATION OF ALL EXISTING UTILITIES AND PROVIDE THE REQUIRED COORDINATION FOR THEIR TEMPORARY DISCONNECTION, PROTECTION, AND REMOVAL AS MAY BE REQUIRED DURING CONSTRUCTION. CONTRACTOR SHALL COORDINATE WITH THE CITY TO DETERMINE WHETHER TEMPORARY SERVICES ARE NECESSARY. THE CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL EXISTING UTILITIES, STRUCTURES AND SERVICES BEFORE COMMENCING WORK. THE LOCATIONS AND ALIGNMENTS OF EXISTING UTILITIES, STRUCTURES AND SERVICES SHOWN ON THE DRAWINGS SHALL BE DEEMED TO BE APPROXIMATION ONLY. THE CONTRACTOR SHALL VERIFY THE LOCATIONS AND DEPTH OF UTILITIES THROUGH UNDERGROUND SERVICE ALERT (USA), POTHOLES OR OTHER METHODS. ALL DISCREPANCIES BETWEEN WHAT IS SHOWN AND THE ACTUAL FIELD CONDITIONS SHALL BE REPORTED TO THE CITY REPRESENTATIVE.
4. ALL REFERENCE MARKINGS MADE BY THE CONTRACTOR SHALL BE DONE WITH SPRAY CHALK, AND SHALL BE REMOVED BY THE CONTRACTOR WHEN NO LONGER NEEDED.
5. ALL EXISTING FEATURES ARE TO REMAIN UNLESS OTHERWISE NOTED. THE CONTRACTOR SHALL BE RESPONSIBLE FOR REPAIRING OR REPLACING, AT THE CONTRACTOR'S EXPENSE, ANY EXISTING ITEM DAMAGED OR DESTROYED BY CONSTRUCTION OPERATIONS. CONTRACTOR SHALL BE RESPONSIBLE FOR REPAIRING OR REPLACING ANY AND ALL DAMAGES TO ADJACENT PROPERTIES. THE DAMAGED ITEMS SHALL BE RESTORED TO AN "AS-WAS" OR BETTER CONDITION OR REPLACED PER THE DISCRETION OF THE CITY REPRESENTATIVE.
6. NO MATERIALS OR EQUIPMENT SHALL BE STORED WITHIN THE CANOPY DRIPLINE OF EXISTING TREES.
7. ALL EXISTING TREES, LAWN AND OTHER PLANTING LOCATED OUTSIDE THE LIMIT OR WORK AREA SHALL BE PRESERVED, AND REMAIN AND BE PROTECTED.
8. CONTRACTOR SHALL FLUSH AND CLEAR DEBRIS FROM EXISTING DRAIN LINE AND TEST TO ENSURE POSITIVE DRAINAGE. IF THE EXISTING LINE NEEDS TO BE REMOVED AND REPLACED, IT SHALL BE DONE AT THE LINEAR FOOT COST FOR "REMOVE DRAINAGE SYSTEM" AND "FRENCH DRAIN".


No.	DATE	REVISION	BY	APPD
△				
△				
△				
△				




CITY OF  
**Fremont**  
APPROVED -- SENIOR LANDSCAPE ARCHITECT  
*Mark...*

DRINKING FOUNTAIN REPLACEMENT AND CONNECTION  
CENTRAL PARK - PICNIC AREA A  
PUBLIC WORKS DEPARTMENT  
DATE 11-26-2019  
RECOMMENDED -- PROJECT MANAGER  
*...*  
DATE 11-26-2019

CITY PROJECT: PWC 8769  
FEDERAL PROJECT:  
DESIGNED BY: EL  
CHECKED BY: MM  
DRAWN BY: EL  
DATE: 11-26-2019  
SCALE: 1"=10'-0"  
0 1' 1"  
NOTE: VERIFY SCALE. BAR IS ONE INCH ON ORIGINAL DRAWING. ADJUST SCALES ACCORDINGLY IF BAR IS NOT ONE INCH.  
DRAWING: **L4.0**  
SHEET 6 OF 18

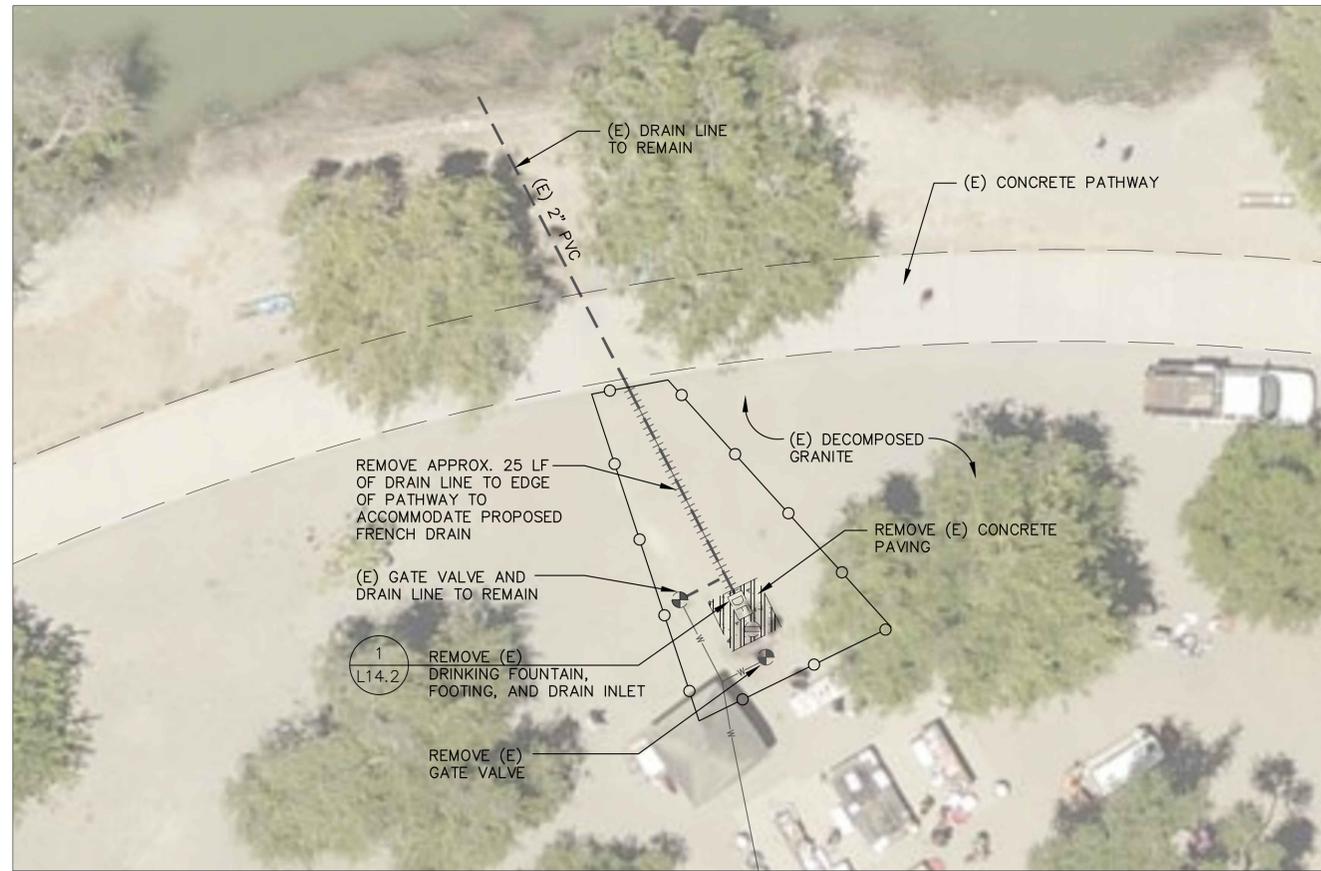

EXISTING CONDITIONS/DEMOLITION PLAN

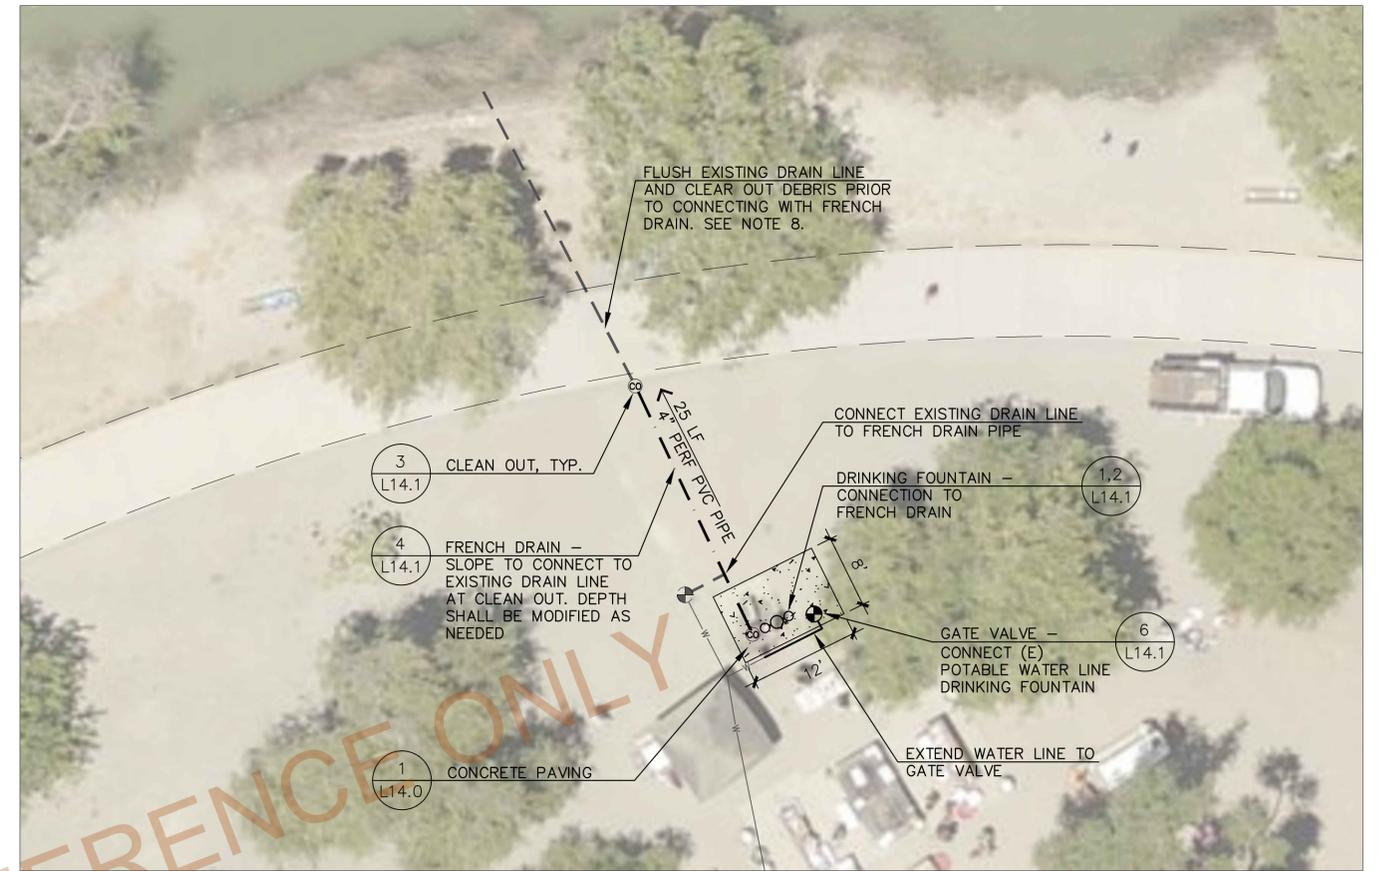

IMPROVEMENT PLAN

LEGEND:

	TEMPORARY CONSTRUCTION FENCING
	REMOVE CONCRETE AND ASPHALT PAVING TO SUBGRADE
	(E) DRINKING FOUNTAIN
	(E) SANITARY SEWER CLEAN OUT
	(E) GATE VALVE
	(E) DRAIN INLET
	(E) SANITARY SEWER
	(E) POTABLE WATER
	(E) PVC DRAIN LINE
	(N) PERFORATED PVC PIPE
	(N) DRINKING FOUNTAIN
	(N) GATE VALVE
	(N) CLEAN OUT
	(N) CONCRETE PAVING

NOTES:

1. THE CONTRACTOR SHALL VERIFY THAT EXISTING CONDITIONS ARE AS INDICATED ON THE DRAWINGS. NOTIFY THE CITY REPRESENTATIVE OF VARIATIONS OR DISCREPANCIES. DO NOT PROCEED WITH AFFECTED WORK UNTIL THE VARIATIONS OR DISCREPANCIES ARE RESOLVED.
2. THE CONTRACTOR SHALL PERFORM ALL CLEARING, DEMOLITION, REMOVAL OF OBSTRUCTIONS AND SITE PREPARATION NECESSARY FOR THE PROPER EXECUTION OF ALL WORK CONTAINED IN THE CONTRACT DOCUMENTS.
3. THE CONTRACTOR SHALL VERIFY LOCATION OF ALL EXISTING UTILITIES AND PROVIDE THE REQUIRED COORDINATION FOR THEIR TEMPORARY DISCONNECTION, PROTECTION, AND REMOVAL AS MAY BE REQUIRED DURING CONSTRUCTION. CONTRACTOR SHALL COORDINATE WITH THE CITY TO DETERMINE WHETHER TEMPORARY SERVICES ARE NECESSARY. THE CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL EXISTING UTILITIES, STRUCTURES AND SERVICES BEFORE COMMENCING WORK. THE LOCATIONS AND ALIGNMENTS OF EXISTING UTILITIES, STRUCTURES AND SERVICES SHOWN ON THE DRAWINGS SHALL BE DEEMED TO BE APPROXIMATION ONLY. THE CONTRACTOR SHALL VERIFY THE LOCATIONS AND DEPTH OF UTILITIES THROUGH UNDERGROUND SERVICE ALERT (USA), POTHOLES OR OTHER METHODS. ALL DISCREPANCIES BETWEEN WHAT IS SHOWN AND THE ACTUAL FIELD CONDITIONS SHALL BE REPORTED TO THE CITY REPRESENTATIVE.
4. ALL REFERENCE MARKINGS MADE BY THE CONTRACTOR SHALL BE DONE WITH SPRAY CHALK, AND SHALL BE REMOVED BY THE CONTRACTOR WHEN NO LONGER NEEDED.
5. ALL EXISTING FEATURES ARE TO REMAIN UNLESS OTHERWISE NOTED. THE CONTRACTOR SHALL BE RESPONSIBLE FOR REPAIRING OR REPLACING, AT THE CONTRACTOR'S EXPENSE, ANY EXISTING ITEM DAMAGED OR DESTROYED BY CONSTRUCTION OPERATIONS. CONTRACTOR SHALL BE RESPONSIBLE FOR REPAIRING OR REPLACING ANY AND ALL DAMAGES TO ADJACENT PROPERTIES. THE DAMAGED ITEMS SHALL BE RESTORED TO AN "AS-WAS" OR BETTER CONDITION OR REPLACED PER THE DISCRETION OF THE CITY REPRESENTATIVE.
6. NO MATERIALS OR EQUIPMENT SHALL BE STORED WITHIN THE CANOPY DRIPLINE OF EXISTING TREES.
7. ALL EXISTING TREES, LAWN AND OTHER PLANTING LOCATED OUTSIDE THE LIMIT OR WORK AREA SHALL BE PRESERVED, AND REMAIN AND BE PROTECTED.
8. CONTRACTOR SHALL FLUSH AND CLEAR DEBRIS FROM EXISTING DRAIN LINE AND TEST TO ENSURE POSITIVE DRAINAGE. IF THE EXISTING LINE NEEDS TO BE REMOVED AND REPLACED, IT SHALL BE DONE AT THE LINEAR FOOT COST FOR "REMOVE DRAINAGE SYSTEM" AND "FRENCH DRAIN".

No.	DATE	REVISION	BY	APPD
△				
△				
△				
△				



**DRINKING FOUNTAIN REPLACEMENT AND CONNECTION**


**CENTRAL PARK - PICNIC AREA D**

**PUBLIC WORKS DEPARTMENT**

APPROVED -- SENIOR LANDSCAPE ARCHITECT DATE 11-26-2019

RECOMMENDED -- PROJECT MANAGER DATE 11-26-2019

CITY PROJECT: PWC 8769	SCALE: 1"=10'-0"	DRAWING: <b>L5.0</b> SHEET 7 OF 18
FEDERAL PROJECT:	0  -----  1' NOTE: VERIFY SCALE. BAR IS ONE INCH ON ORIGINAL DRAWING. ADJUST SCALES ACCORDINGLY IF BAR IS NOT ONE INCH.	
DESIGNED BY: EL	CHECKED BY: MM	
DRAWN BY: EL	DATE: 11-26-2019	

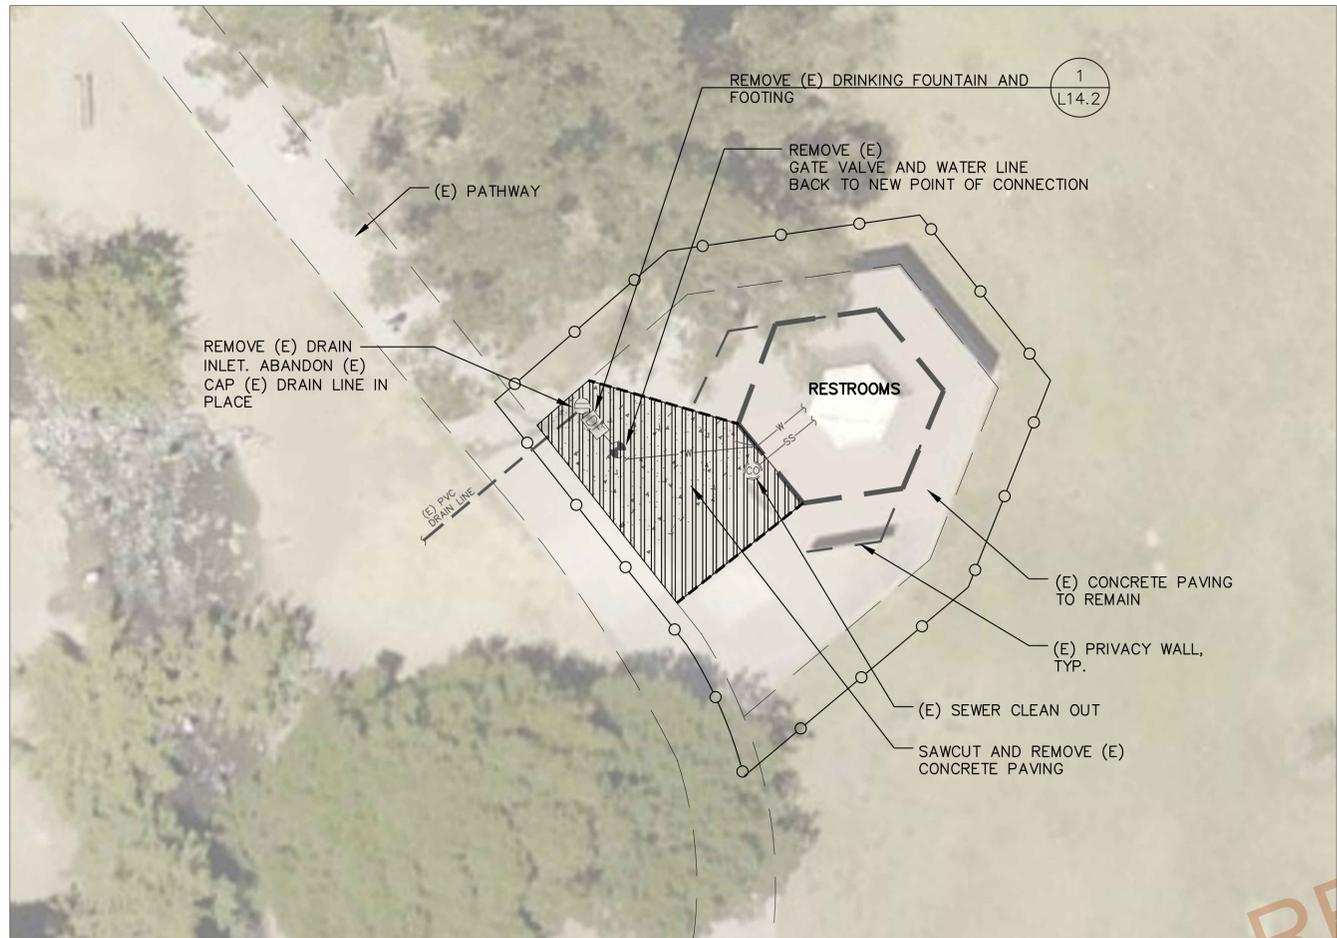


**LEGEND:**

	TEMPORARY CONSTRUCTION FENCING
	REMOVE CONCRETE AND ASPHALT PAVING TO SUBGRADE
	(E) DRINKING FOUNTAIN
	(E) SANITARY SEWER CLEAN OUT
	(E) GATE VALVE
	(E) DRAIN INLET
	(E) SANITARY SEWER
	(E) POTABLE WATER
	(E) PVC DRAIN LINE
	(N) PERFORATED PVC PIPE
	(N) DRINKING FOUNTAIN
	(N) GATE VALVE
	(N) CLEAN OUT
	(N) CONCRETE PAVING

**NOTES:**

1. THE CONTRACTOR SHALL VERIFY THAT EXISTING CONDITIONS ARE AS INDICATED ON THE DRAWINGS. NOTIFY THE CITY REPRESENTATIVE OF VARIATIONS OR DISCREPANCIES. DO NOT PROCEED WITH AFFECTED WORK UNTIL THE VARIATIONS OR DISCREPANCIES ARE RESOLVED.
2. THE CONTRACTOR SHALL PERFORM ALL CLEARING, DEMOLITION, REMOVAL OF OBSTRUCTIONS AND SITE PREPARATION NECESSARY FOR THE PROPER EXECUTION OF ALL WORK CONTAINED IN THE CONTRACT DOCUMENTS.
3. THE CONTRACTOR SHALL VERIFY LOCATION OF ALL EXISTING UTILITIES AND PROVIDE THE REQUIRED COORDINATION FOR THEIR TEMPORARY DISCONNECTION, PROTECTION, AND REMOVAL AS MAY BE REQUIRED DURING CONSTRUCTION. CONTRACTOR SHALL COORDINATE WITH THE CITY TO DETERMINE WHETHER TEMPORARY SERVICES ARE NECESSARY. THE CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL EXISTING UTILITIES, STRUCTURES AND SERVICES BEFORE COMMENCING WORK. THE LOCATIONS AND ALIGNMENTS OF EXISTING UTILITIES, STRUCTURES AND SERVICES SHOWN ON THE DRAWINGS SHALL BE DEEMED TO BE APPROXIMATION ONLY. THE CONTRACTOR SHALL VERIFY THE LOCATIONS AND DEPTH OF UTILITIES THROUGH UNDERGROUND SERVICE ALERT (USA), POTHOLES OR OTHER METHODS. ALL DISCREPANCIES BETWEEN WHAT IS SHOWN AND THE ACTUAL FIELD CONDITIONS SHALL BE REPORTED TO THE CITY REPRESENTATIVE.
4. ALL REFERENCE MARKINGS MADE BY THE CONTRACTOR SHALL BE DONE WITH SPRAY CHALK, AND SHALL BE REMOVED BY THE CONTRACTOR WHEN NO LONGER NEEDED.
5. ALL EXISTING FEATURES ARE TO REMAIN UNLESS OTHERWISE NOTED. THE CONTRACTOR SHALL BE RESPONSIBLE FOR REPAIRING OR REPLACING, AT THE CONTRACTOR'S EXPENSE, ANY EXISTING ITEM DAMAGED OR DESTROYED BY CONSTRUCTION OPERATIONS. CONTRACTOR SHALL BE RESPONSIBLE FOR REPAIRING OR REPLACING ANY AND ALL DAMAGES TO ADJACENT PROPERTIES. THE DAMAGED ITEMS SHALL BE RESTORED TO AN "AS-WAS" OR BETTER CONDITION OR REPLACED PER THE DISCRETION OF THE CITY REPRESENTATIVE.
6. NO MATERIALS OR EQUIPMENT SHALL BE STORED WITHIN THE CANOPY DRIPLINE OF EXISTING TREES.
7. ALL EXISTING TREES, LAWN AND OTHER PLANTING LOCATED OUTSIDE THE LIMIT OR WORK AREA SHALL BE PRESERVED, AND REMAIN AND BE PROTECTED.

No.	DATE	REVISION	BY	APPD

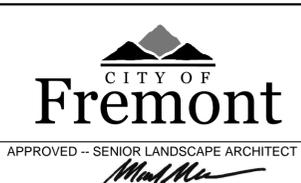


**DRINKING FOUNTAIN REPLACEMENT AND CONNECTION**  
**CENTRAL PARK - BABBLING BROOK RESTROOM**  
**PUBLIC WORKS DEPARTMENT**


APPROVED -- SENIOR LANDSCAPE ARCHITECT: *Robert E. Ravenhag* DATE: 11-26-2019  
 RECOMMENDED -- PROJECT MANAGER: *Shane* DATE: 11-26-2019

CITY PROJECT: PWC 8769	SCALE: 1"=10'-0"	DRAWING: <b>L6.0</b> SHEET 8 OF 18
FEDERAL PROJECT:	0 1' 1" (Scale bar)	
DESIGNED BY: EL	CHECKED BY: MM	
DRAWN BY: EL	DATE: 11-26-2019	



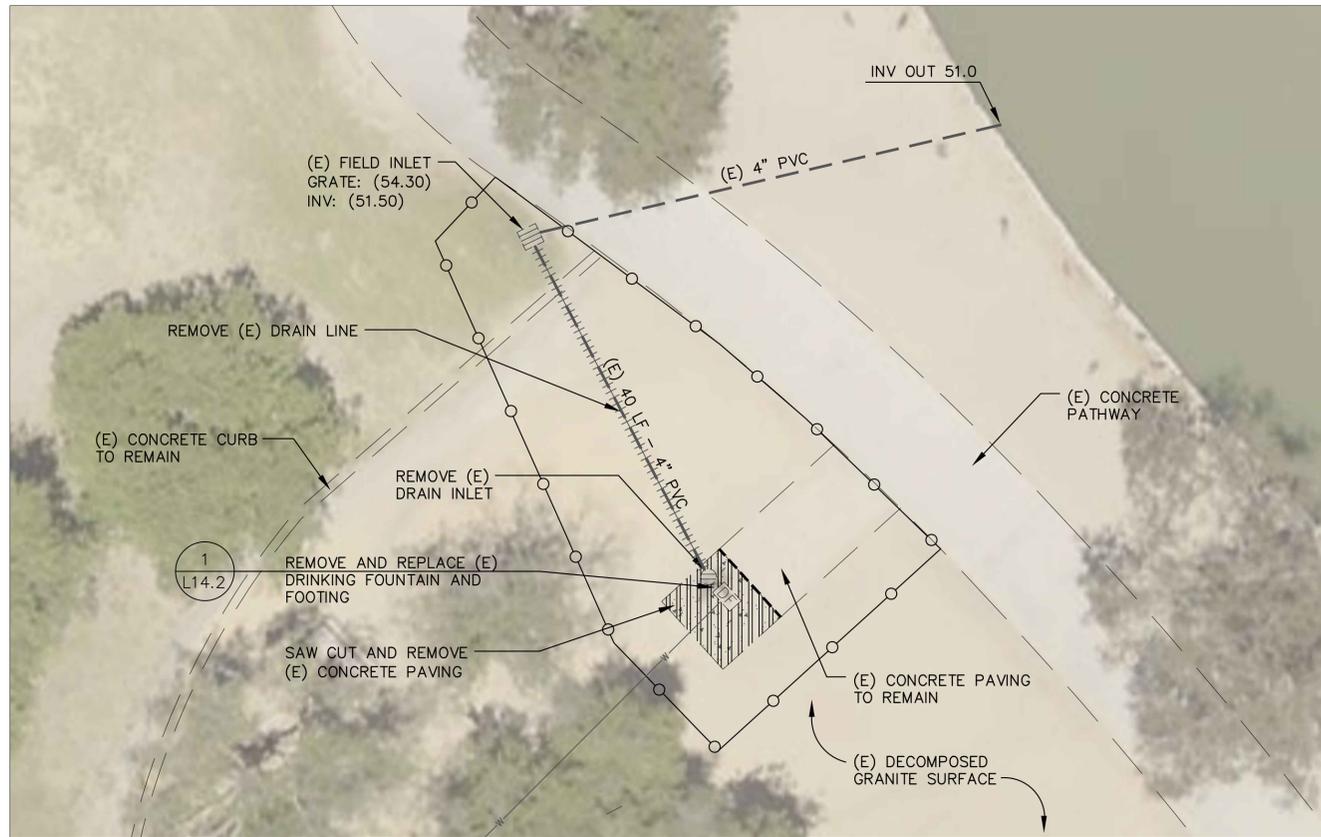

EXISTING CONDITIONS/DEMOLITION PLAN

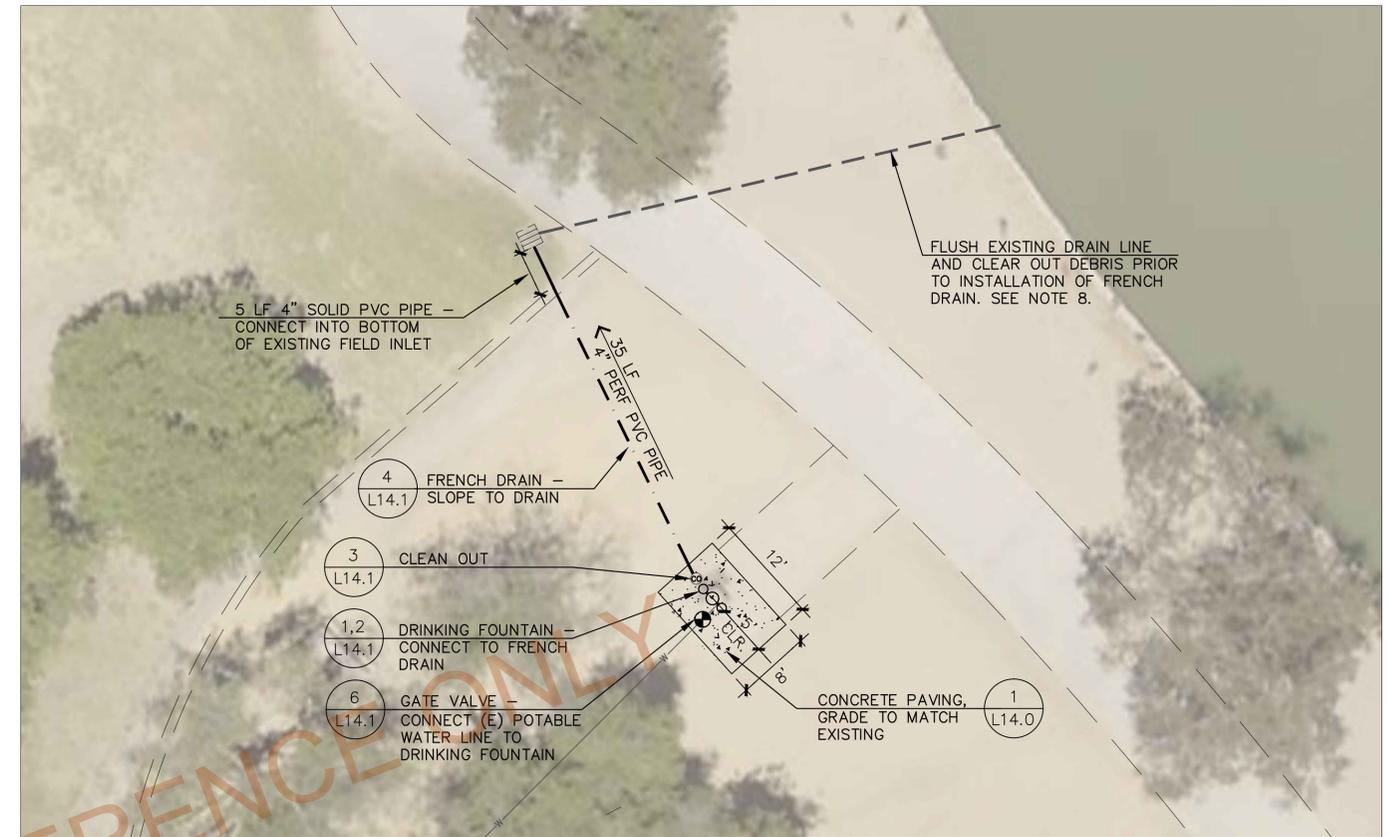

IMPROVEMENT PLAN

**LEGEND:**

	TEMPORARY CONSTRUCTION FENCING
	REMOVE CONCRETE AND ASPHALT PAVING TO SUBGRADE
	(E) DRINKING FOUNTAIN
	(E) SANITARY SEWER CLEAN OUT
	(E) GATE VALVE
	(E) DRAIN INLET
	(E) SANITARY SEWER
	(E) POTABLE WATER
	(E) PVC DRAIN LINE
	(N) PERFORATED PVC PIPE
	(N) DRINKING FOUNTAIN
	(N) GATE VALVE
	(N) CLEAN OUT
	(N) CONCRETE PAVING

- NOTES:**
1. THE CONTRACTOR SHALL VERIFY THAT EXISTING CONDITIONS ARE AS INDICATED ON THE DRAWINGS. NOTIFY THE CITY REPRESENTATIVE OF VARIATIONS OR DISCREPANCIES. DO NOT PROCEED WITH AFFECTED WORK UNTIL THE VARIATIONS OR DISCREPANCIES ARE RESOLVED.
  2. THE CONTRACTOR SHALL PERFORM ALL CLEARING, DEMOLITION, REMOVAL OF OBSTRUCTIONS AND SITE PREPARATION NECESSARY FOR THE PROPER EXECUTION OF ALL WORK CONTAINED IN THE CONTRACT DOCUMENTS.
  3. THE CONTRACTOR SHALL VERIFY LOCATION OF ALL EXISTING UTILITIES AND PROVIDE THE REQUIRED COORDINATION FOR THEIR TEMPORARY DISCONNECTION, PROTECTION, AND REMOVAL AS MAY BE REQUIRED DURING CONSTRUCTION. CONTRACTOR SHALL COORDINATE WITH THE CITY TO DETERMINE WHETHER TEMPORARY SERVICES ARE NECESSARY. THE CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL EXISTING UTILITIES, STRUCTURES AND SERVICES BEFORE COMMENCING WORK. THE LOCATIONS AND ALIGNMENTS OF EXISTING UTILITIES, STRUCTURES AND SERVICES SHOWN ON THE DRAWINGS SHALL BE DEEMED TO BE APPROXIMATION ONLY. THE CONTRACTOR SHALL VERIFY THE LOCATIONS AND DEPTH OF UTILITIES THROUGH UNDERGROUND SERVICE ALERT (USA), POTHOLES OR OTHER METHODS. ALL DISCREPANCIES BETWEEN WHAT IS SHOWN AND THE ACTUAL FIELD CONDITIONS SHALL BE REPORTED TO THE CITY REPRESENTATIVE.
  4. ALL REFERENCE MARKINGS MADE BY THE CONTRACTOR SHALL BE DONE WITH SPRAY CHALK, AND SHALL BE REMOVED BY THE CONTRACTOR WHEN NO LONGER NEEDED.
  5. ALL EXISTING FEATURES ARE TO REMAIN UNLESS OTHERWISE NOTED. THE CONTRACTOR SHALL BE RESPONSIBLE FOR REPAIRING OR REPLACING, AT THE CONTRACTOR'S EXPENSE, ANY EXISTING ITEM DAMAGED OR DESTROYED BY CONSTRUCTION OPERATIONS. CONTRACTOR SHALL BE RESPONSIBLE FOR REPAIRING OR REPLACING ANY AND ALL DAMAGES TO ADJACENT PROPERTIES. THE DAMAGED ITEMS SHALL BE RESTORED TO AN "AS-WAS" OR BETTER CONDITION OR REPLACED PER THE DISCRETION OF THE CITY REPRESENTATIVE.
  6. NO MATERIALS OR EQUIPMENT SHALL BE STORED WITHIN THE CANOPY DRIPLINE OF EXISTING TREES.
  7. ALL EXISTING TREES, LAWN AND OTHER PLANTING LOCATED OUTSIDE THE LIMIT OR WORK AREA SHALL BE PRESERVED, AND REMAIN AND BE PROTECTED.
  8. CONTRACTOR SHALL FLUSH AND CLEAR DEBRIS FROM EXISTING DRAIN LINE AND TEST TO ENSURE POSITIVE DRAINAGE. IF THE EXISTING LINE NEEDS TO BE REMOVED AND REPLACED, IT SHALL BE DONE AT THE LINEAR FOOT COST FOR "REMOVE DRAINAGE SYSTEM" AND "FRENCH DRAIN".

No.	DATE	REVISION	BY	APPD



**CITY OF Fremont**  
 APPROVED -- SENIOR LANDSCAPE ARCHITECT  
*Mark...*

**DRINKING FOUNTAIN REPLACEMENT AND CONNECTION**  
**CENTRAL PARK - REDWOOD PICNIC AREA**  
**PUBLIC WORKS DEPARTMENT**

DATE 11-26-2019      RECOMMENDED -- PROJECT MANAGER      DATE 11-26-2019

CITY PROJECT: PWC 8769      SCALE: 1"=10'-0"

FEDERAL PROJECT:


DESIGNED BY: EL      CHECKED BY: MM

DRAWN BY: EL      DATE: 11-26-2019


NOTE: VERIFY SCALE. BAR IS ONE INCH ON ORIGINAL DRAWING. ADJUST SCALES ACCORDINGLY IF BAR IS NOT ONE INCH.

**L7.0**

SHEET 9 OF 18

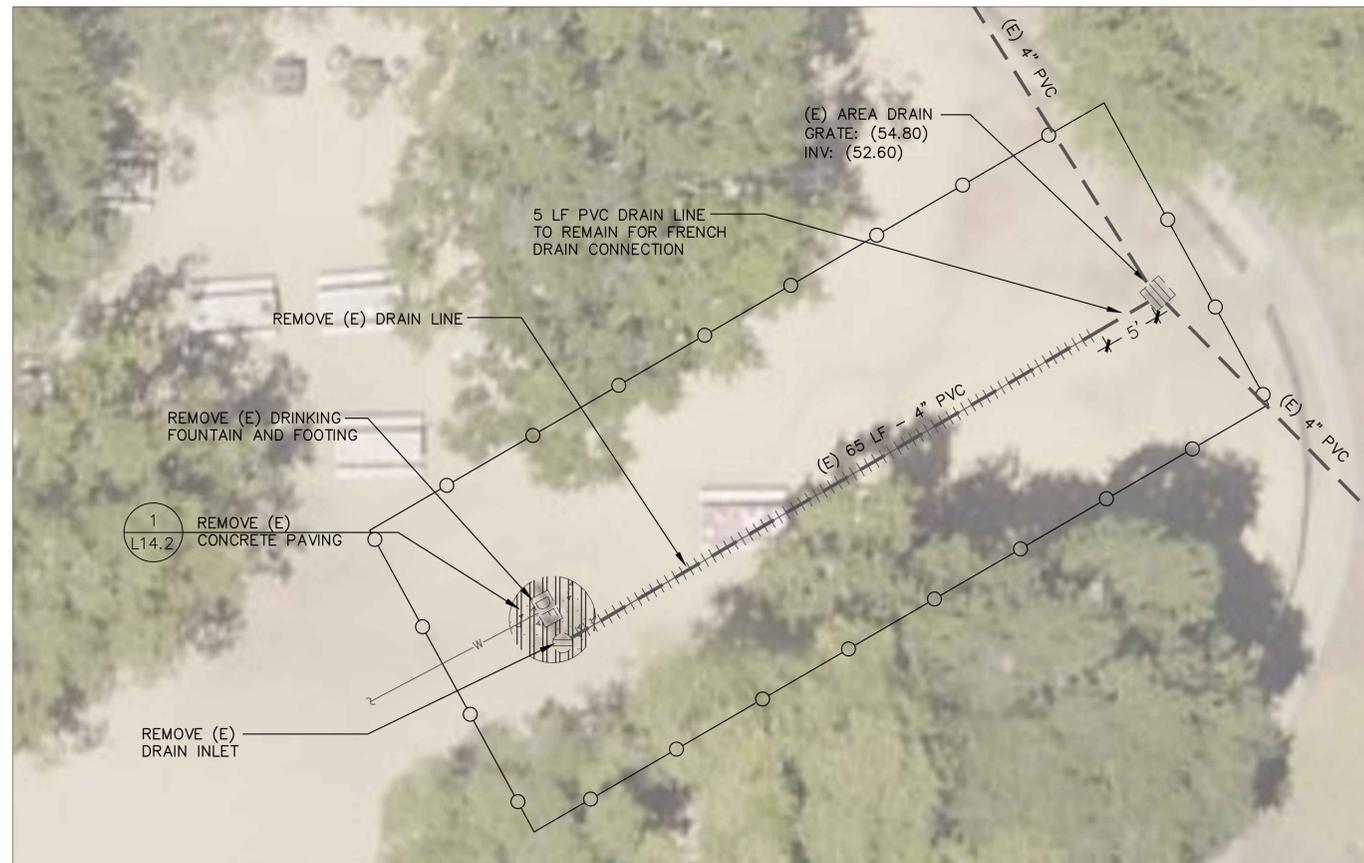

EXISTING CONDITIONS/DEMOLITION PLAN

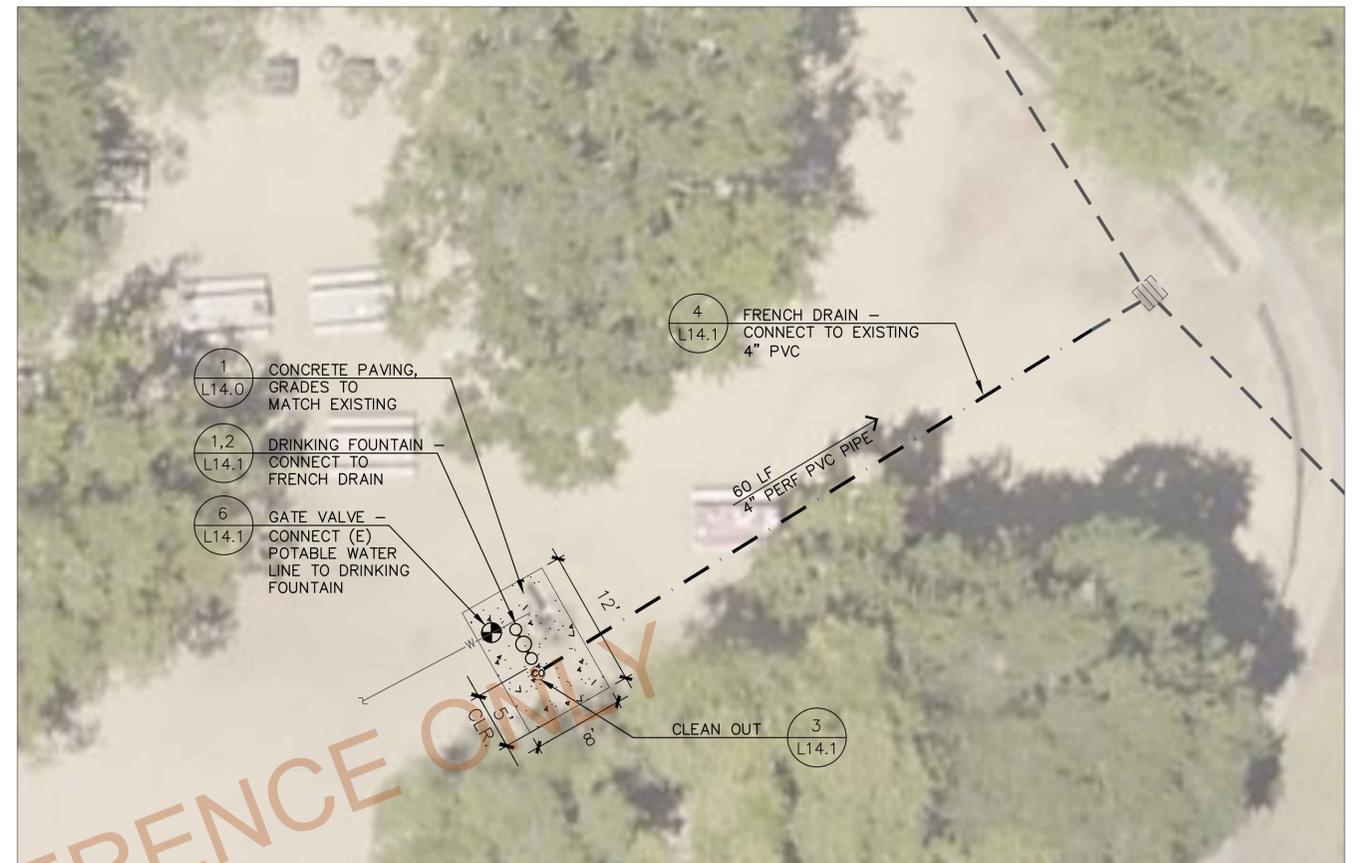

IMPROVEMENT PLAN

LEGEND:

	TEMPORARY CONSTRUCTION FENCING
	REMOVE CONCRETE AND ASPHALT PAVING TO SUBGRADE
	(E) DRINKING FOUNTAIN
	(E) SANITARY SEWER CLEAN OUT
	(E) GATE VALVE
	(E) DRAIN INLET
	(E) SANITARY SEWER
	(E) POTABLE WATER
	(E) PVC DRAIN LINE
	(N) PERFORATED PVC PIPE
	(N) DRINKING FOUNTAIN
	(N) GATE VALVE
	(N) CLEAN OUT
	(N) CONCRETE PAVING

NOTES:

1. THE CONTRACTOR SHALL VERIFY THAT EXISTING CONDITIONS ARE AS INDICATED ON THE DRAWINGS. NOTIFY THE CITY REPRESENTATIVE OF VARIATIONS OR DISCREPANCIES. DO NOT PROCEED WITH AFFECTED WORK UNTIL THE VARIATIONS OR DISCREPANCIES ARE RESOLVED.
2. THE CONTRACTOR SHALL PERFORM ALL CLEARING, DEMOLITION, REMOVAL OF OBSTRUCTIONS AND SITE PREPARATION NECESSARY FOR THE PROPER EXECUTION OF ALL WORK CONTAINED IN THE CONTRACT DOCUMENTS.
3. THE CONTRACTOR SHALL VERIFY LOCATION OF ALL EXISTING UTILITIES AND PROVIDE THE REQUIRED COORDINATION FOR THEIR TEMPORARY DISCONNECTION, PROTECTION, AND REMOVAL AS MAY BE REQUIRED DURING CONSTRUCTION. CONTRACTOR SHALL COORDINATE WITH THE CITY TO DETERMINE WHETHER TEMPORARY SERVICES ARE NECESSARY. THE CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL EXISTING UTILITIES, STRUCTURES AND SERVICES BEFORE COMMENCING WORK. THE LOCATIONS AND ALIGNMENTS OF EXISTING UTILITIES, STRUCTURES AND SERVICES SHOWN ON THE DRAWINGS SHALL BE DEEMED TO BE APPROXIMATION ONLY. THE CONTRACTOR SHALL VERIFY THE LOCATIONS AND DEPTH OF UTILITIES THROUGH UNDERGROUND SERVICE ALERT (USA), POTHOLES OR OTHER METHODS. ALL DISCREPANCIES BETWEEN WHAT IS SHOWN AND THE ACTUAL FIELD CONDITIONS SHALL BE REPORTED TO THE CITY REPRESENTATIVE.
4. ALL REFERENCE MARKINGS MADE BY THE CONTRACTOR SHALL BE DONE WITH SPRAY CHALK, AND SHALL BE REMOVED BY THE CONTRACTOR WHEN NO LONGER NEEDED.
5. ALL EXISTING FEATURES ARE TO REMAIN UNLESS OTHERWISE NOTED. THE CONTRACTOR SHALL BE RESPONSIBLE FOR REPAIRING OR REPLACING, AT THE CONTRACTOR'S EXPENSE, ANY EXISTING ITEM DAMAGED OR DESTROYED BY CONSTRUCTION OPERATIONS. CONTRACTOR SHALL BE RESPONSIBLE FOR REPAIRING OR REPLACING ANY AND ALL DAMAGES TO ADJACENT PROPERTIES. THE DAMAGED ITEMS SHALL BE RESTORED TO AN "AS-WAS" OR BETTER CONDITION OR REPLACED PER THE DISCRETION OF THE CITY REPRESENTATIVE.
6. NO MATERIALS OR EQUIPMENT SHALL BE STORED WITHIN THE CANOPY DRIPLINE OF EXISTING TREES.
7. ALL EXISTING TREES, LAWN AND OTHER PLANTING LOCATED OUTSIDE THE LIMIT OR WORK AREA SHALL BE PRESERVED, AND REMAIN AND BE PROTECTED.

No.	DATE	REVISION	BY	APPD
△				
△				
△				
△				




DRINKING FOUNTAIN REPLACEMENT AND CONNECTION

CENTRAL PARK - LIONS PICNIC AREA  
PUBLIC WORKS DEPARTMENT


APPROVED -- SENIOR LANDSCAPE ARCHITECT	DATE 11-26-2019	RECOMMENDED -- PROJECT MANAGER	DATE 11-26-2019
--	-----------------	--------------------------------	-----------------

CITY PROJECT: PWC 8769	SCALE: 1/8"=1'-0"	DRAWING: <b>L8.0</b>
FEDERAL PROJECT:	0  -----  1'	
DESIGNED BY: EL	CHECKED BY: MM	
DRAWN BY: EL	DATE: 11-26-2019	



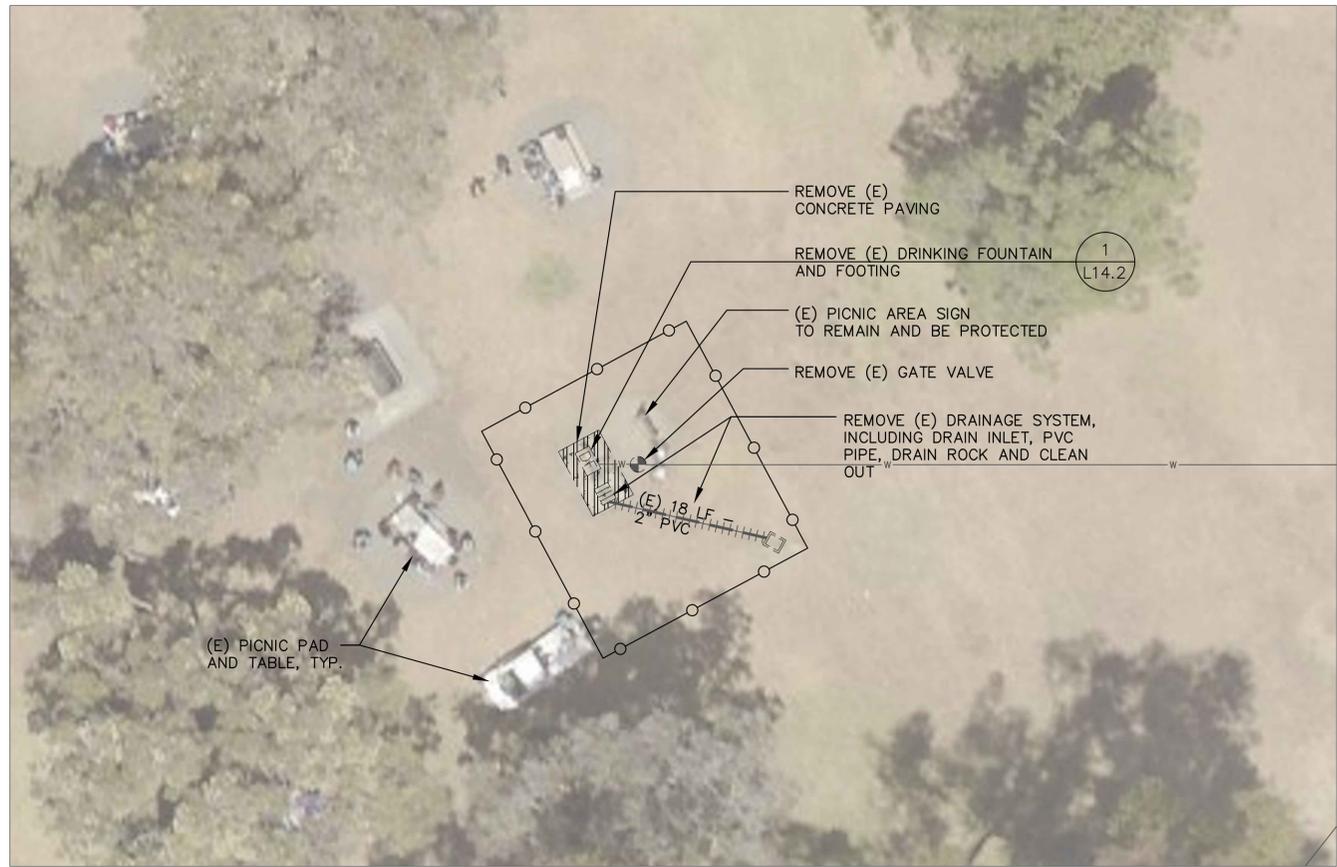

EXISTING CONDITIONS/DEMOLITION PLAN

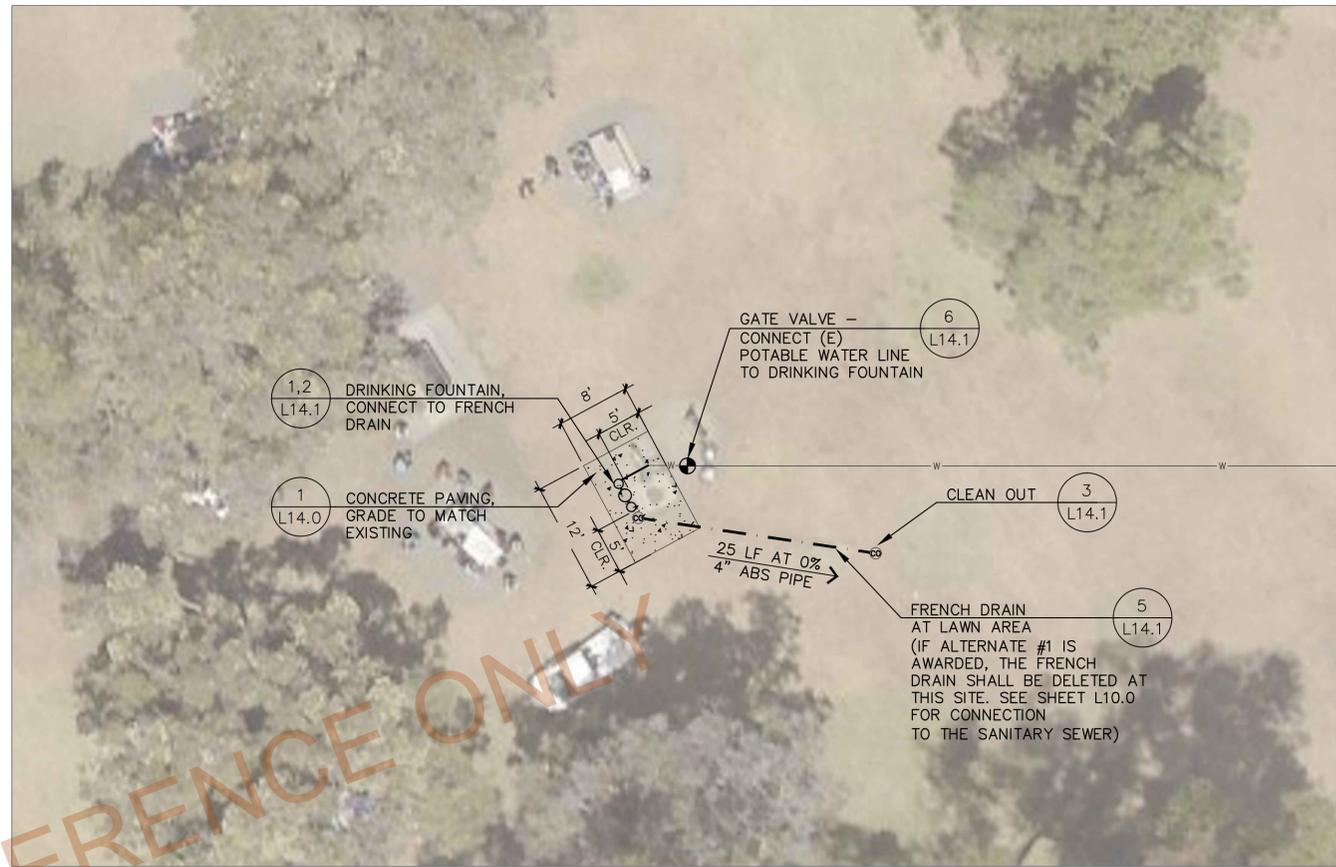

IMPROVEMENT PLAN

LEGEND:

	TEMPORARY CONSTRUCTION FENCING
	REMOVE CONCRETE AND ASPHALT PAVING TO SUBGRADE
	(E) DRINKING FOUNTAIN
	(E) SANITARY SEWER CLEAN OUT
	(E) GATE VALVE
	(E) DRAIN INLET
	(E) SANITARY SEWER
	(E) POTABLE WATER
	(E) PVC DRAIN LINE
	(N) PERFORATED PVC PIPE
	(N) DRINKING FOUNTAIN
	(N) GATE VALVE
	(N) CLEAN OUT
	(N) CONCRETE PAVING

NOTES:

1. THE CONTRACTOR SHALL VERIFY THAT EXISTING CONDITIONS ARE AS INDICATED ON THE DRAWINGS. NOTIFY THE CITY REPRESENTATIVE OF VARIATIONS OR DISCREPANCIES. DO NOT PROCEED WITH AFFECTED WORK UNTIL THE VARIATIONS OR DISCREPANCIES ARE RESOLVED.
2. THE CONTRACTOR SHALL PERFORM ALL CLEARING, DEMOLITION, REMOVAL OF OBSTRUCTIONS AND SITE PREPARATION NECESSARY FOR THE PROPER EXECUTION OF ALL WORK CONTAINED IN THE CONTRACT DOCUMENTS.
3. THE CONTRACTOR SHALL VERIFY LOCATION OF ALL EXISTING UTILITIES AND PROVIDE THE REQUIRED COORDINATION FOR THEIR TEMPORARY DISCONNECTION, PROTECTION, AND REMOVAL AS MAY BE REQUIRED DURING CONSTRUCTION. CONTRACTOR SHALL COORDINATE WITH THE CITY TO DETERMINE WHETHER TEMPORARY SERVICES ARE NECESSARY. THE CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL EXISTING UTILITIES, STRUCTURES AND SERVICES BEFORE COMMENCING WORK. THE LOCATIONS AND ALIGNMENTS OF EXISTING UTILITIES, STRUCTURES AND SERVICES SHOWN ON THE DRAWINGS SHALL BE DEEMED TO BE APPROXIMATION ONLY. THE CONTRACTOR SHALL VERIFY THE LOCATIONS AND DEPTH OF UTILITIES THROUGH UNDERGROUND SERVICE ALERT (USA), POTHOLING OR OTHER METHODS. ALL DISCREPANCIES BETWEEN WHAT IS SHOWN AND THE ACTUAL FIELD CONDITIONS SHALL BE REPORTED TO THE CITY REPRESENTATIVE.
4. ALL REFERENCE MARKINGS MADE BY THE CONTRACTOR SHALL BE DONE WITH SPRAY CHALK, AND SHALL BE REMOVED BY THE CONTRACTOR WHEN NO LONGER NEEDED.
5. ALL EXISTING FEATURES ARE TO REMAIN UNLESS OTHERWISE NOTED. THE CONTRACTOR SHALL BE RESPONSIBLE FOR REPAIRING OR REPLACING, AT THE CONTRACTOR'S EXPENSE, ANY EXISTING ITEM DAMAGED OR DESTROYED BY CONSTRUCTION OPERATIONS. CONTRACTOR SHALL BE RESPONSIBLE FOR REPAIRING OR REPLACING ANY AND ALL DAMAGES TO ADJACENT PROPERTIES. THE DAMAGED ITEMS SHALL BE RESTORED TO AN "AS-WAS" OR BETTER CONDITION OR REPLACED PER THE DISCRETION OF THE CITY REPRESENTATIVE.
6. NO MATERIALS OR EQUIPMENT SHALL BE STORED WITHIN THE CANOPY DRIPLINE OF EXISTING TREES.
7. ALL EXISTING TREES, LAWN AND OTHER PLANTING LOCATED OUTSIDE THE LIMIT OR WORK AREA SHALL BE PRESERVED, AND REMAIN AND BE PROTECTED.

No.	DATE	REVISION	BY	APPD
△				
△				
△				
△				



DRINKING FOUNTAIN REPLACEMENT AND CONNECTION

CENTRAL PARK - PICNIC AREA B  
PUBLIC WORKS DEPARTMENT

APPROVED -- SENIOR LANDSCAPE ARCHITECT

DATE 11-26-2019

RECOMMENDED -- PROJECT MANAGER


DATE 11-26-2019

CITY PROJECT: PWC 8769	
FEDERAL PROJECT:	
DESIGNED BY: EL	CHECKED BY: MM
DRAWN BY: EL	DATE: 11-26-2019

SCALE: 1"=10'-0"
0 1' 1"
NOTE: VERIFY SCALE. BAR IS ONE INCH ON ORIGINAL DRAWING. ADJUST SCALES ACCORDINGLY IF BAR IS NOT ONE INCH.

DRAWING: L9.0
SHEET 11 OF 18



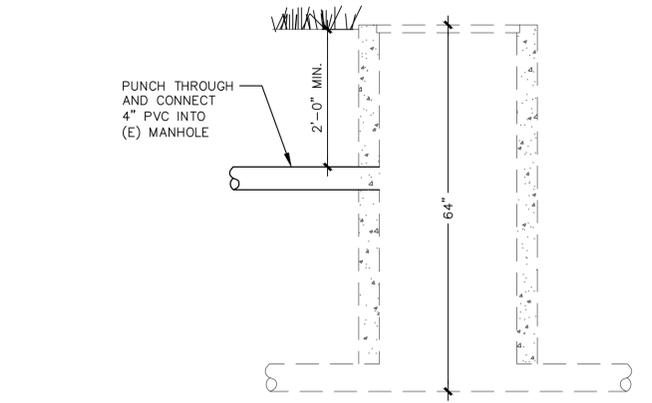

**CONNECTION INTO EXISTING MANHOLE**  
SCALE: 3/4" = 1'-0"

CITY COUNCIL REFERENCE ONLY

**IMPROVEMENT PLAN**


**NOTES:**

1. REFER TO SHEET L9.0 FOR EXISTING CONDITIONS AND PROPOSED WORK FOR THE DRINKING FOUNTAIN.
2. REFER TO BASE BID SHEETS FOR LEGEND AND PROJECT NOTES.




No.	DATE	REVISION	BY	APPD				CITY PROJECT:	SCALE:	DRAWING:		
△					 <b>DRINKING FOUNTAIN REPLACEMENT AND CONNECTION</b> <b>CENTRAL PARK - PICNIC AREA B (ALTERNATE #1)</b> <b>PUBLIC WORKS DEPARTMENT</b>			PWC 8769	1"=10'-0"	<b>L10.0</b> <small>SHEET 12 OF 18</small>		
△				<small>APPROVED -- SENIOR LANDSCAPE ARCHITECT</small> 				FEDERAL PROJECT:	0  -----  1'			
△				<small>DATE</small> 11-26-2019 <small>RECOMMENDED -- PROJECT MANAGER</small> 				DESIGNED BY: EL	CHECKED BY: MM			
△				<small>DATE</small> 11-26-2019				DRAWN BY: EL	DATE: 11-26-2019			

NOTE: VERIFY SCALE. BAR IS ONE INCH ON ORIGINAL DRAWING. ADJUST SCALES ACCORDINGLY IF BAR IS NOT ONE INCH.

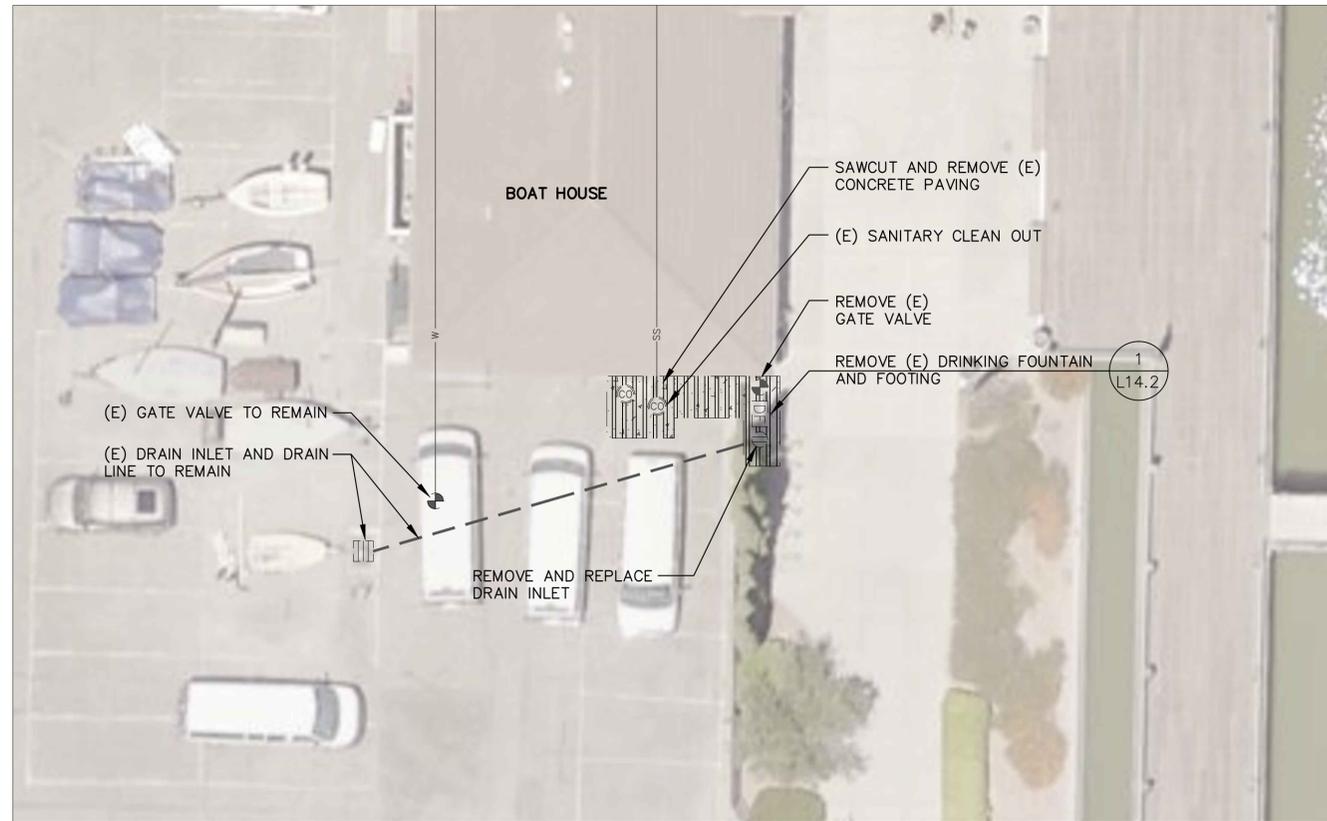

EXISTING CONDITION/DEMOLITION PLAN

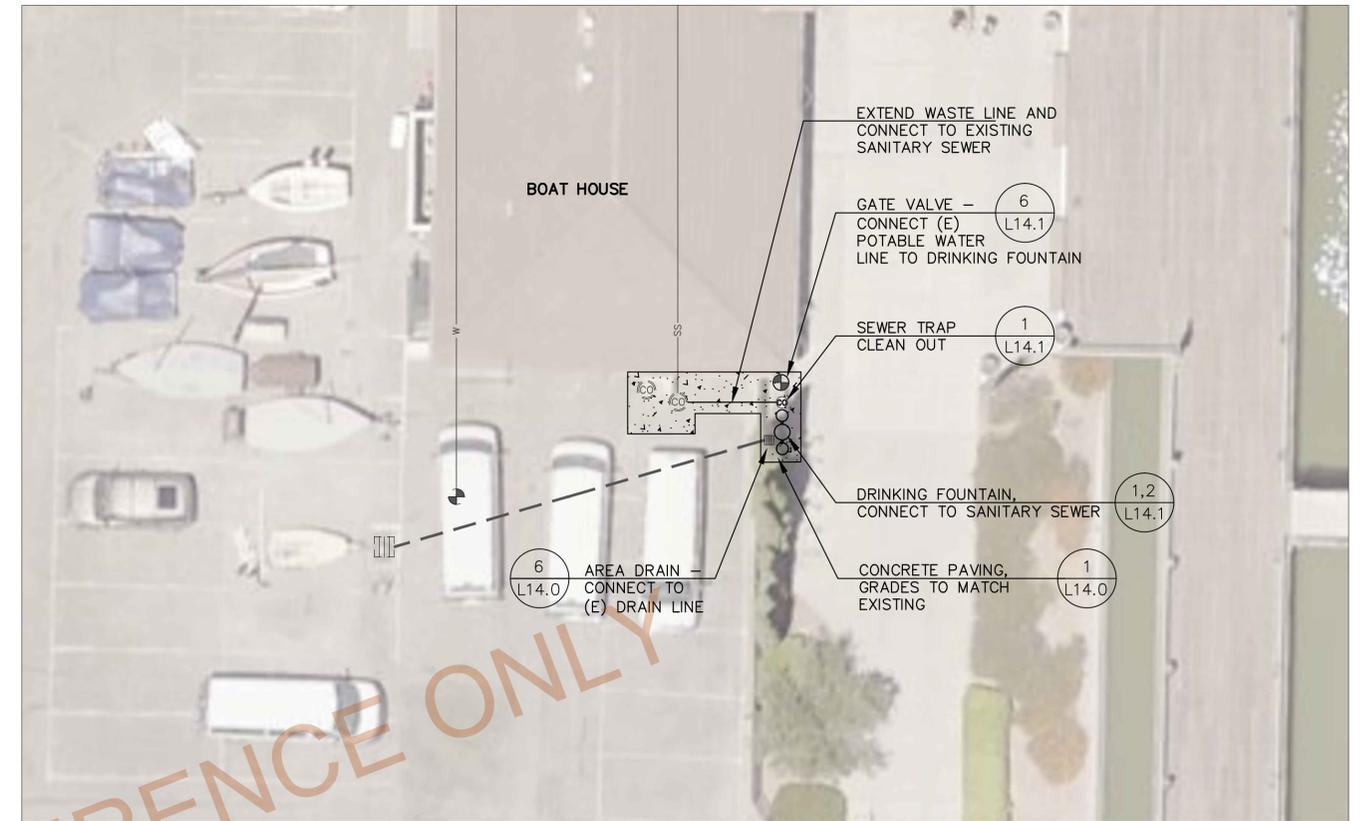

IMPROVEMENT PLAN

LEGEND:

	TEMPORARY CONSTRUCTION FENCING
	REMOVE CONCRETE AND ASPHALT PAVING TO SUBGRADE
	(E) DRINKING FOUNTAIN
	(E) SANITARY SEWER CLEAN OUT
	(E) GATE VALVE
	(E) DRAIN INLET
	(E) SANITARY SEWER
	(E) POTABLE WATER
	(E) PVC DRAIN LINE
	(N) PERFORATED PVC PIPE
	(N) DRINKING FOUNTAIN
	(N) GATE VALVE
	(N) CLEAN OUT
	(N) CONCRETE PAVING

NOTES:

1. THE CONTRACTOR SHALL VERIFY THAT EXISTING CONDITIONS ARE AS INDICATED ON THE DRAWINGS. NOTIFY THE CITY REPRESENTATIVE OF VARIATIONS OR DISCREPANCIES. DO NOT PROCEED WITH AFFECTED WORK UNTIL THE VARIATIONS OR DISCREPANCIES ARE RESOLVED.
2. THE CONTRACTOR SHALL PERFORM ALL CLEARING, DEMOLITION, REMOVAL OF OBSTRUCTIONS AND SITE PREPARATION NECESSARY FOR THE PROPER EXECUTION OF ALL WORK CONTAINED IN THE CONTRACT DOCUMENTS.
3. THE CONTRACTOR SHALL VERIFY LOCATION OF ALL EXISTING UTILITIES AND PROVIDE THE REQUIRED COORDINATION FOR THEIR TEMPORARY DISCONNECTION, PROTECTION, AND REMOVAL AS MAY BE REQUIRED DURING CONSTRUCTION. CONTRACTOR SHALL COORDINATE WITH THE CITY TO DETERMINE WHETHER TEMPORARY SERVICES ARE NECESSARY. THE CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL EXISTING UTILITIES, STRUCTURES AND SERVICES BEFORE COMMENCING WORK. THE LOCATIONS AND ALIGNMENTS OF EXISTING UTILITIES, STRUCTURES AND SERVICES SHOWN ON THE DRAWINGS SHALL BE DEEMED TO BE APPROXIMATION ONLY. THE CONTRACTOR SHALL VERIFY THE LOCATIONS AND DEPTH OF UTILITIES THROUGH UNDERGROUND SERVICE ALERT (USA), POTHOLES OR OTHER METHODS. ALL DISCREPANCIES BETWEEN WHAT IS SHOWN AND THE ACTUAL FIELD CONDITIONS SHALL BE REPORTED TO THE CITY REPRESENTATIVE.
4. ALL REFERENCE MARKINGS MADE BY THE CONTRACTOR SHALL BE DONE WITH SPRAY CHALK, AND SHALL BE REMOVED BY THE CONTRACTOR WHEN NO LONGER NEEDED.
5. ALL EXISTING FEATURES ARE TO REMAIN UNLESS OTHERWISE NOTED. THE CONTRACTOR SHALL BE RESPONSIBLE FOR REPAIRING OR REPLACING, AT THE CONTRACTOR'S EXPENSE, ANY EXISTING ITEM DAMAGED OR DESTROYED BY CONSTRUCTION OPERATIONS. CONTRACTOR SHALL BE RESPONSIBLE FOR REPAIRING OR REPLACING ANY AND ALL DAMAGES TO ADJACENT PROPERTIES. THE DAMAGED ITEMS SHALL BE RESTORED TO AN "AS-WAS" OR BETTER CONDITION OR REPLACED PER THE DISCRETION OF THE CITY REPRESENTATIVE.
6. NO MATERIALS OR EQUIPMENT SHALL BE STORED WITHIN THE CANOPY DRIPLINE OF EXISTING TREES.
7. ALL EXISTING TREES, LAWN AND OTHER PLANTING LOCATED OUTSIDE THE LIMIT OR WORK AREA SHALL BE PRESERVED, AND REMAIN AND BE PROTECTED.

No.	DATE	REVISION	BY	APPD
△				
△				
△				
△				



DRINKING FOUNTAIN REPLACEMENT AND CONNECTION

CENTRAL PARK - BOAT HOUSE  
PUBLIC WORKS DEPARTMENT

APPROVED -- SENIOR LANDSCAPE ARCHITECT

DATE 11-26-2019

RECOMMENDED -- PROJECT MANAGER


DATE 11-26-2019

CITY PROJECT: PWC 8769	
FEDERAL PROJECT:	
DESIGNED BY: EL	CHECKED BY: MM
DRAWN BY: EL	DATE: 11-26-2019


SCALE: 1"=10'-0"
0  -----  1' NOTE: VERIFY SCALE. BAR IS ONE INCH ON ORIGINAL DRAWING. ADJUST SCALES ACCORDINGLY IF BAR IS NOT ONE INCH.

DRAWING: <b>L11.0</b>
SHEET 13 OF 18



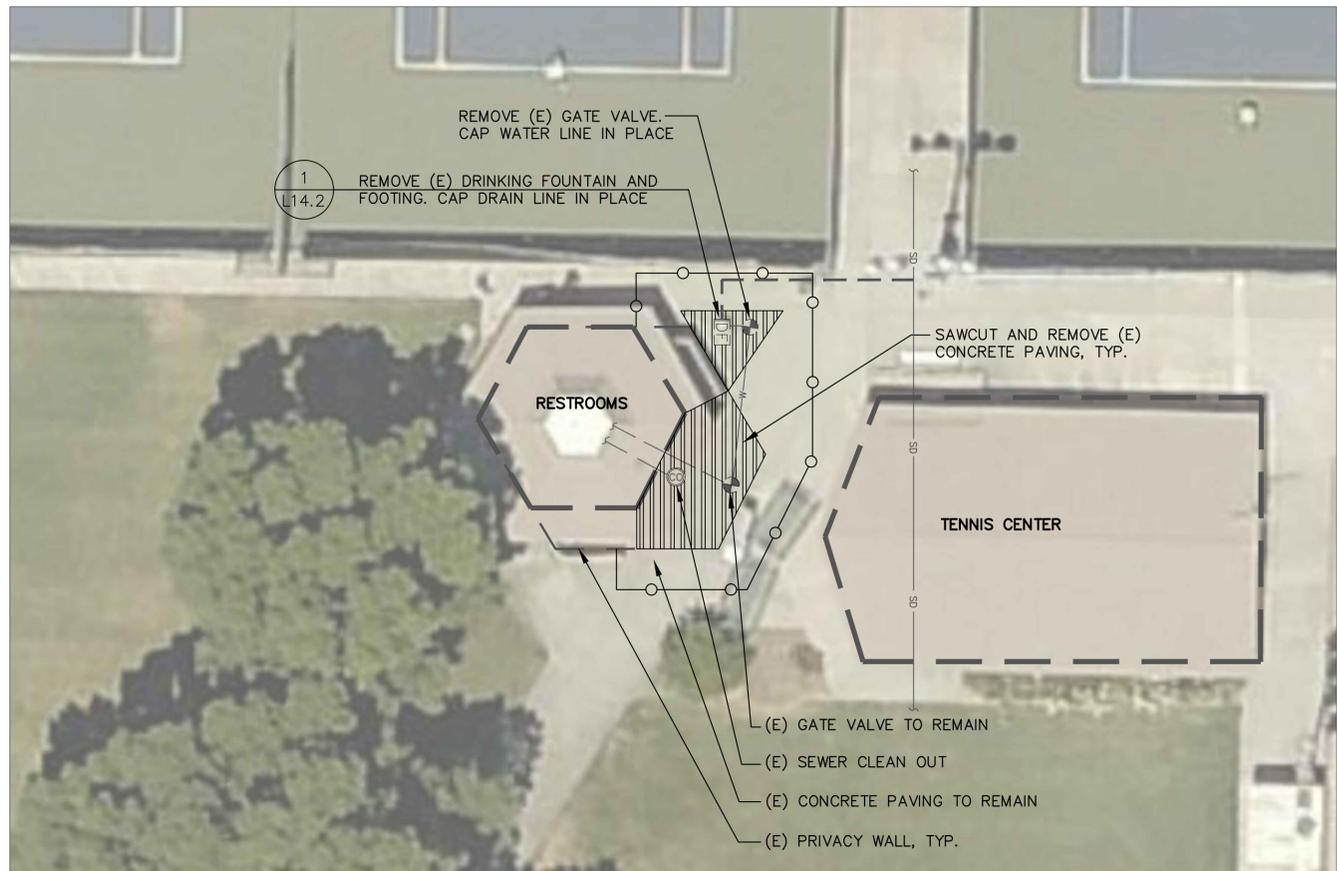

EXISTING CONDITIONS/DEMOLITION PLAN

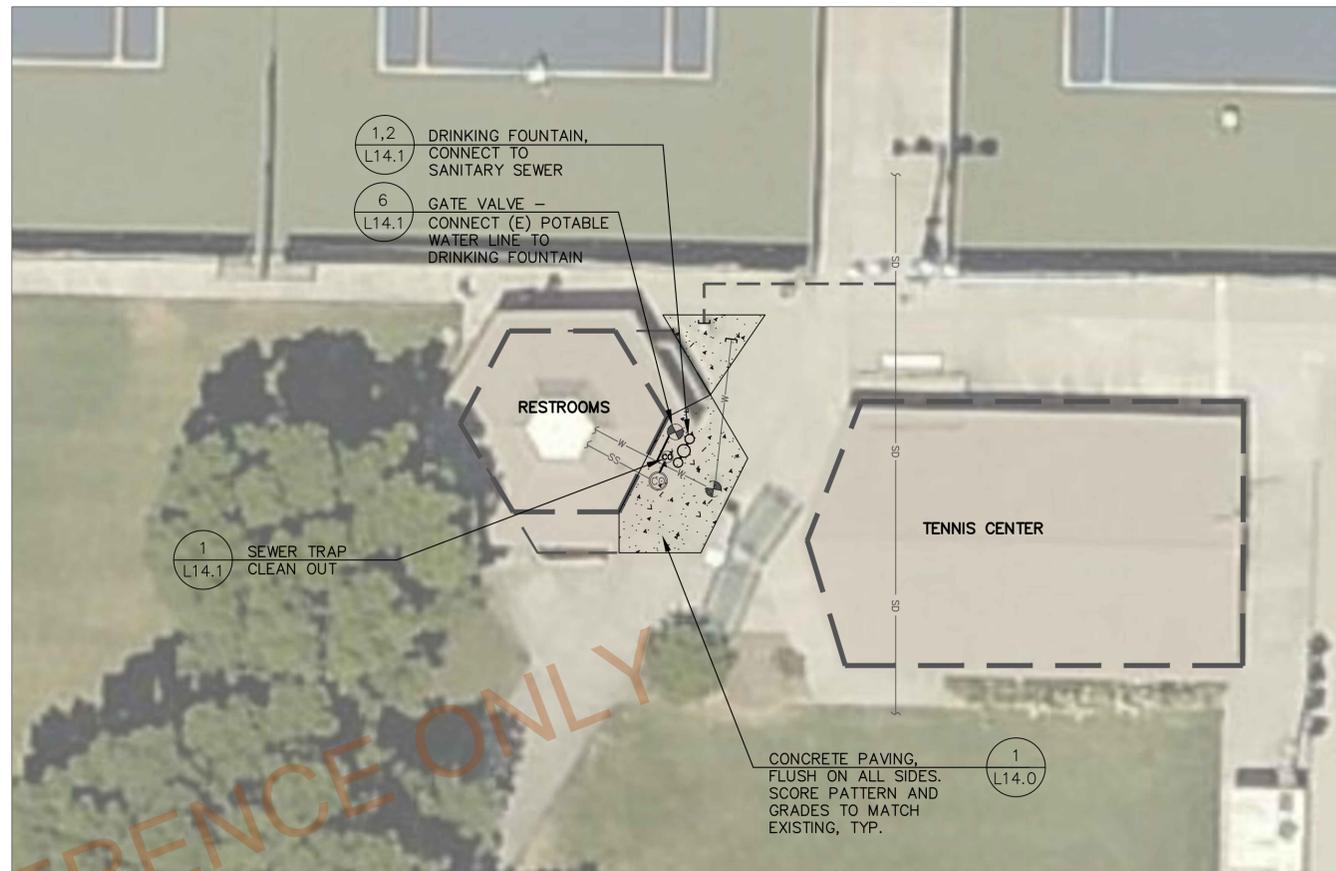

IMPROVEMENT PLAN

LEGEND:

	TEMPORARY CONSTRUCTION FENCING
	REMOVE CONCRETE AND ASPHALT PAVING TO SUBGRADE
	(E) DRINKING FOUNTAIN
	(E) SANITARY SEWER CLEAN OUT
	(E) GATE VALVE
	(E) DRAIN INLET
	(E) SANITARY SEWER
	(E) POTABLE WATER
	(E) STORM DRAIN (RCP)
	(E) PVC DRAIN LINE
	(N) PERFORATED PVC PIPE
	(N) DRINKING FOUNTAIN
	(N) GATE VALVE
	(N) CLEAN OUT
	(N) CONCRETE PAVING

NOTES:

1. THE CONTRACTOR SHALL VERIFY THAT EXISTING CONDITIONS ARE AS INDICATED ON THE DRAWINGS. NOTIFY THE CITY REPRESENTATIVE OF VARIATIONS OR DISCREPANCIES. DO NOT PROCEED WITH AFFECTED WORK UNTIL THE VARIATIONS OR DISCREPANCIES ARE RESOLVED.
2. THE CONTRACTOR SHALL PERFORM ALL CLEARING, DEMOLITION, REMOVAL OF OBSTRUCTIONS AND SITE PREPARATION NECESSARY FOR THE PROPER EXECUTION OF ALL WORK CONTAINED IN THE CONTRACT DOCUMENTS.
3. THE CONTRACTOR SHALL VERIFY LOCATION OF ALL EXISTING UTILITIES AND PROVIDE THE REQUIRED COORDINATION FOR THEIR TEMPORARY DISCONNECTION, PROTECTION, AND REMOVAL AS MAY BE REQUIRED DURING CONSTRUCTION. CONTRACTOR SHALL COORDINATE WITH THE CITY TO DETERMINE WHETHER TEMPORARY SERVICES ARE NECESSARY. THE CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL EXISTING UTILITIES, STRUCTURES AND SERVICES BEFORE COMMENCING WORK. THE LOCATIONS AND ALIGNMENTS OF EXISTING UTILITIES, STRUCTURES AND SERVICES SHOWN ON THE DRAWINGS SHALL BE DEEMED TO BE APPROXIMATION ONLY. THE CONTRACTOR SHALL VERIFY THE LOCATIONS AND DEPTH OF UTILITIES THROUGH UNDERGROUND SERVICE ALERT (USA), POTHOLES OR OTHER METHODS. ALL DISCREPANCIES BETWEEN WHAT IS SHOWN AND THE ACTUAL FIELD CONDITIONS SHALL BE REPORTED TO THE CITY REPRESENTATIVE.
4. ALL REFERENCE MARKINGS MADE BY THE CONTRACTOR SHALL BE DONE WITH SPRAY CHALK, AND SHALL BE REMOVED BY THE CONTRACTOR WHEN NO LONGER NEEDED.
5. ALL EXISTING FEATURES ARE TO REMAIN UNLESS OTHERWISE NOTED. THE CONTRACTOR SHALL BE RESPONSIBLE FOR REPAIRING OR REPLACING, AT THE CONTRACTOR'S EXPENSE, ANY EXISTING ITEM DAMAGED OR DESTROYED BY CONSTRUCTION OPERATIONS. CONTRACTOR SHALL BE RESPONSIBLE FOR REPAIRING OR REPLACING ANY AND ALL DAMAGES TO ADJACENT PROPERTIES. THE DAMAGED ITEMS SHALL BE RESTORED TO AN "AS-WAS" OR BETTER CONDITION OR REPLACED PER THE DISCRETION OF THE CITY REPRESENTATIVE.
6. NO MATERIALS OR EQUIPMENT SHALL BE STORED WITHIN THE CANOPY DRIPLINE OF EXISTING TREES.
7. ALL EXISTING TREES, LAWN AND OTHER PLANTING LOCATED OUTSIDE THE LIMIT OR WORK AREA SHALL BE PRESERVED, AND REMAIN AND BE PROTECTED.

No.	DATE	REVISION	BY	APPD
△				
△				
△				
△				




DRINKING FOUNTAIN REPLACEMENT AND CONNECTION


CENTRAL PARK - TENNIS COURT RESTROOM  
PUBLIC WORKS DEPARTMENT

APPROVED -- SENIOR LANDSCAPE ARCHITECT	DATE 11-26-2019	RECOMMENDED -- PROJECT MANAGER	DATE 11-26-2019
--	-----------------	--------------------------------	-----------------

CITY PROJECT: PWC 8769	SCALE: 1"=10'-0"	DRAWING: <b>L12.0</b>
FEDERAL PROJECT:	0 1' 1"	
DESIGNED BY: EL	CHECKED BY: MM	NOTE: VERIFY SCALE. BAR IS ONE INCH ON ORIGINAL DRAWING. ADJUST SCALES ACCORDINGLY IF BAR IS NOT ONE INCH.
DRAWN BY: EL	DATE: 11-26-2019	
		SHEET 14 OF 18

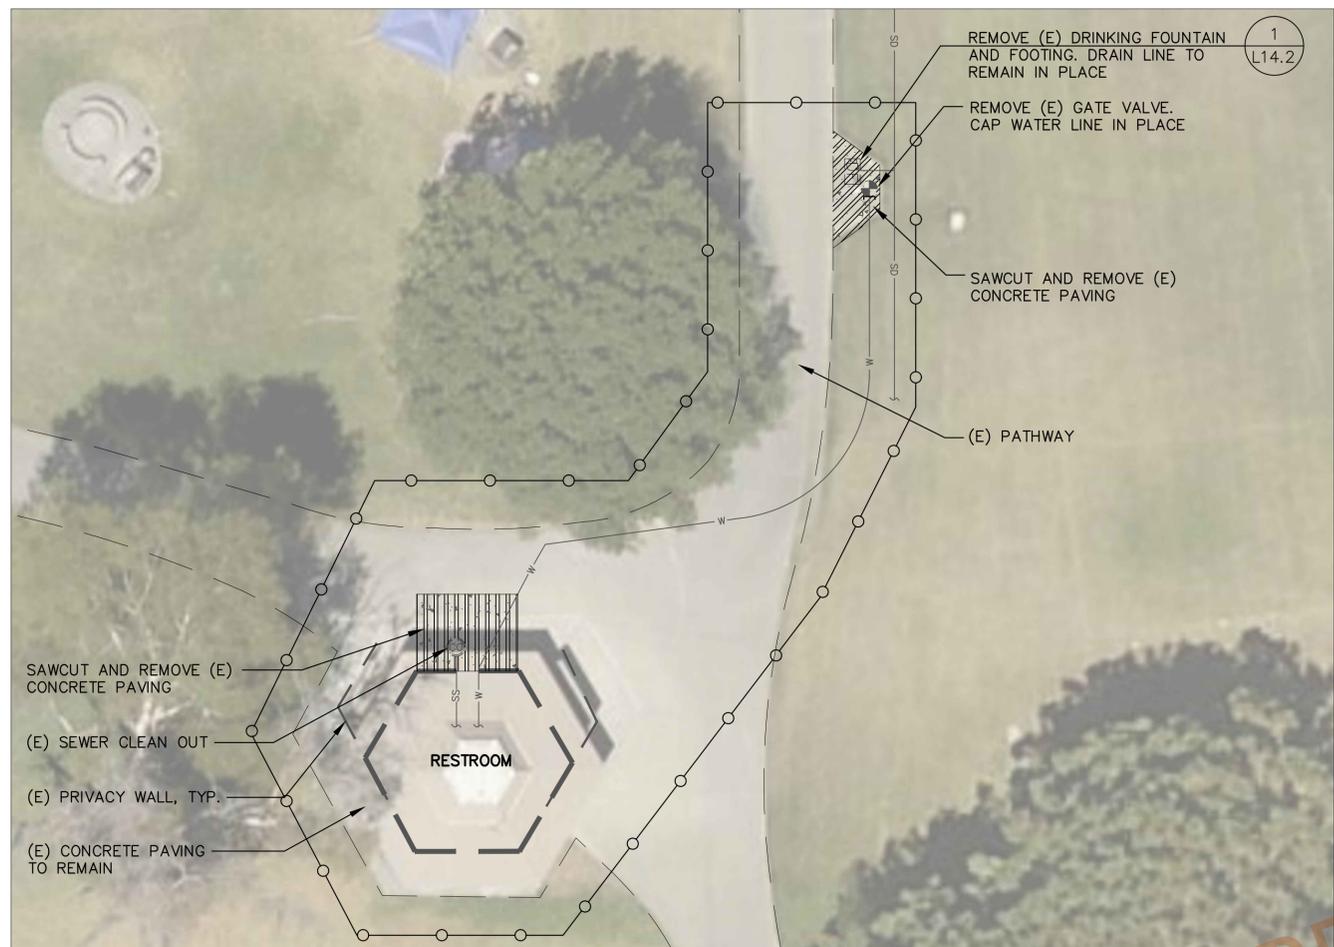

EXISTING CONDITIONS/DEMOLITION PLAN

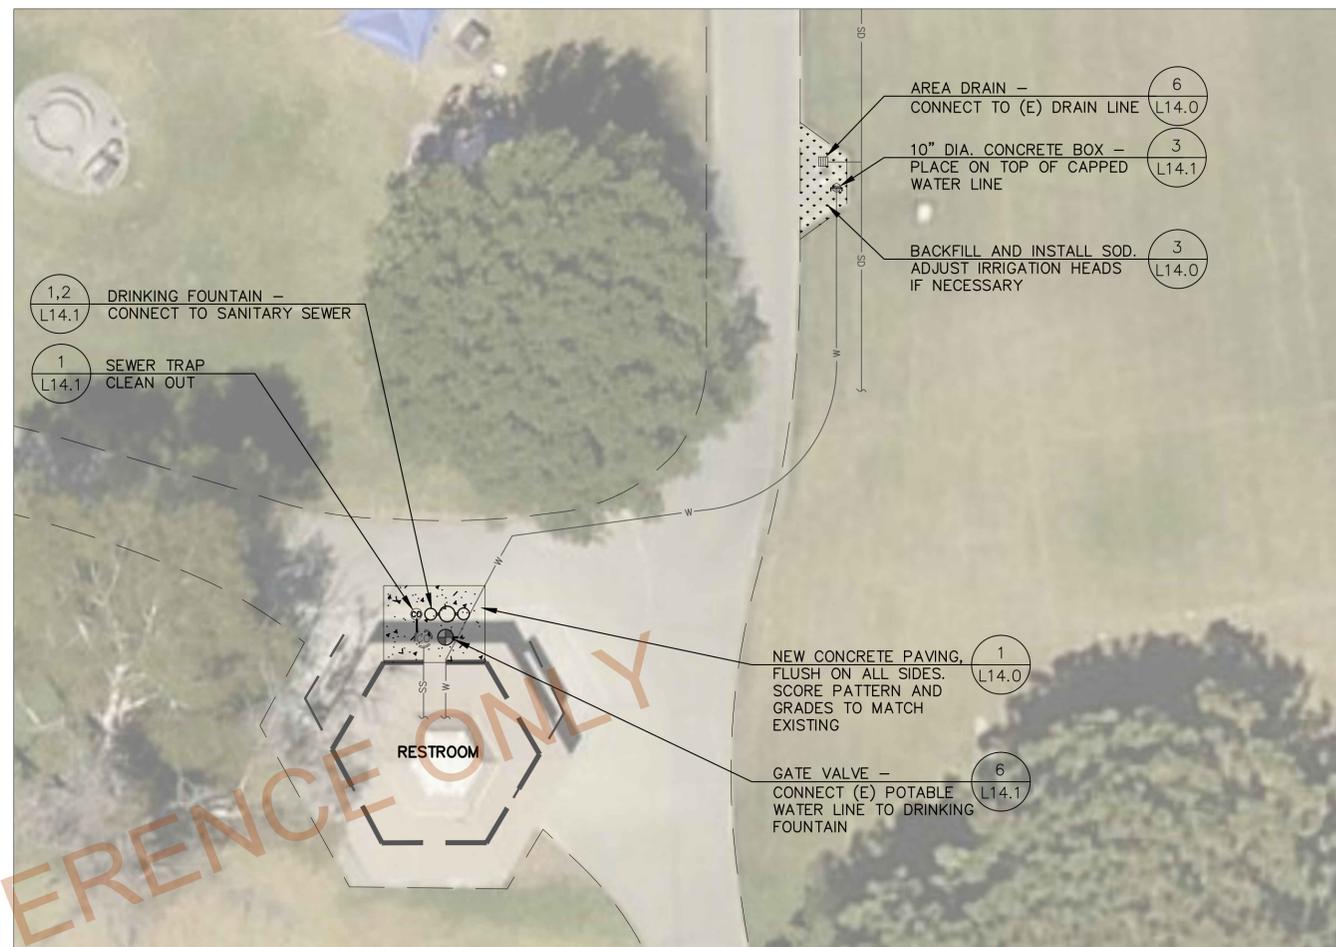

IMPROVEMENT PLAN

**LEGEND:**

	TEMPORARY CONSTRUCTION FENCING
	REMOVE CONCRETE AND ASPHALT PAVING TO SUBGRADE
	(E) DRINKING FOUNTAIN
	(E) SANITARY SEWER CLEAN OUT
	(E) GATE VALVE
	(E) DRAIN INLET
	(E) SANITARY SEWER
	(E) POTABLE WATER
	(E) STORM DRAIN (RCP)
	(E) PVC DRAIN LINE
	(N) PERFORATED PVC PIPE
	(N) DRINKING FOUNTAIN
	(N) GATE VALVE
	(N) CLEAN OUT
	(N) CONCRETE PAVING

- NOTES:**
1. THE CONTRACTOR SHALL VERIFY THAT EXISTING CONDITIONS ARE AS INDICATED ON THE DRAWINGS. NOTIFY THE CITY REPRESENTATIVE OF VARIATIONS OR DISCREPANCIES. DO NOT PROCEED WITH AFFECTED WORK UNTIL THE VARIATIONS OR DISCREPANCIES ARE RESOLVED.
  2. THE CONTRACTOR SHALL PERFORM ALL CLEARING, DEMOLITION, REMOVAL OF OBSTRUCTIONS AND SITE PREPARATION NECESSARY FOR THE PROPER EXECUTION OF ALL WORK CONTAINED IN THE CONTRACT DOCUMENTS.
  3. THE CONTRACTOR SHALL VERIFY LOCATION OF ALL EXISTING UTILITIES AND PROVIDE THE REQUIRED COORDINATION FOR THEIR TEMPORARY DISCONNECTION, PROTECTION, AND REMOVAL AS MAY BE REQUIRED DURING CONSTRUCTION. CONTRACTOR SHALL COORDINATE WITH THE CITY TO DETERMINE WHETHER TEMPORARY SERVICES ARE NECESSARY. THE CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL EXISTING UTILITIES, STRUCTURES AND SERVICES BEFORE COMMENCING WORK. THE LOCATIONS AND ALIGNMENTS OF EXISTING UTILITIES, STRUCTURES AND SERVICES SHOWN ON THE DRAWINGS SHALL BE DEEMED TO BE APPROXIMATION ONLY. THE CONTRACTOR SHALL VERIFY THE LOCATIONS AND DEPTH OF UTILITIES THROUGH UNDERGROUND SERVICE ALERT (USA), POTHOLES OR OTHER METHODS. ALL DISCREPANCIES BETWEEN WHAT IS SHOWN AND THE ACTUAL FIELD CONDITIONS SHALL BE REPORTED TO THE CITY REPRESENTATIVE.
  4. ALL REFERENCE MARKINGS MADE BY THE CONTRACTOR SHALL BE DONE WITH SPRAY CHALK, AND SHALL BE REMOVED BY THE CONTRACTOR WHEN NO LONGER NEEDED.
  5. ALL EXISTING FEATURES ARE TO REMAIN UNLESS OTHERWISE NOTED. THE CONTRACTOR SHALL BE RESPONSIBLE FOR REPAIRING OR REPLACING, AT THE CONTRACTOR'S EXPENSE, ANY EXISTING ITEM DAMAGED OR DESTROYED BY CONSTRUCTION OPERATIONS. CONTRACTOR SHALL BE RESPONSIBLE FOR REPAIRING OR REPLACING ANY AND ALL DAMAGES TO ADJACENT PROPERTIES. THE DAMAGED ITEMS SHALL BE RESTORED TO AN "AS-WAS" OR BETTER CONDITION OR REPLACED PER THE DISCRETION OF THE CITY REPRESENTATIVE.
  6. NO MATERIALS OR EQUIPMENT SHALL BE STORED WITHIN THE CANOPY DRIPLINE OF EXISTING TREES.
  7. ALL EXISTING TREES, LAWN AND OTHER PLANTING LOCATED OUTSIDE THE LIMIT OR WORK AREA SHALL BE PRESERVED, AND REMAIN AND BE PROTECTED.


No.	DATE	REVISION	BY	APPD
△				
△				
△				
△				



**DRINKING FOUNTAIN REPLACEMENT AND CONNECTION**  
**CENTRAL PARK - SOCCER FIELD #1 RESTROOM**  
**PUBLIC WORKS DEPARTMENT**


APPROVED -- SENIOR LANDSCAPE ARCHITECT: *M. M. M.* DATE: 11-26-2019  
 RECOMMENDED -- PROJECT MANAGER: *E. G.* DATE: 11-26-2019

CITY PROJECT: PWC 8769	SCALE: 1"=10'-0"	DRAWING: <b>L13.0</b>
FEDERAL PROJECT:	0 1 1' (Scale bar)	
DESIGNED BY: EL	CHECKED BY: MM	NOTE: VERIFY SCALE. BAR IS ONE INCH ON ORIGINAL DRAWING. ADJUST SCALES ACCORDINGLY IF BAR IS NOT ONE INCH.
DRAWN BY: EL	DATE: 11-26-2019	
		SHEET 15 OF 18

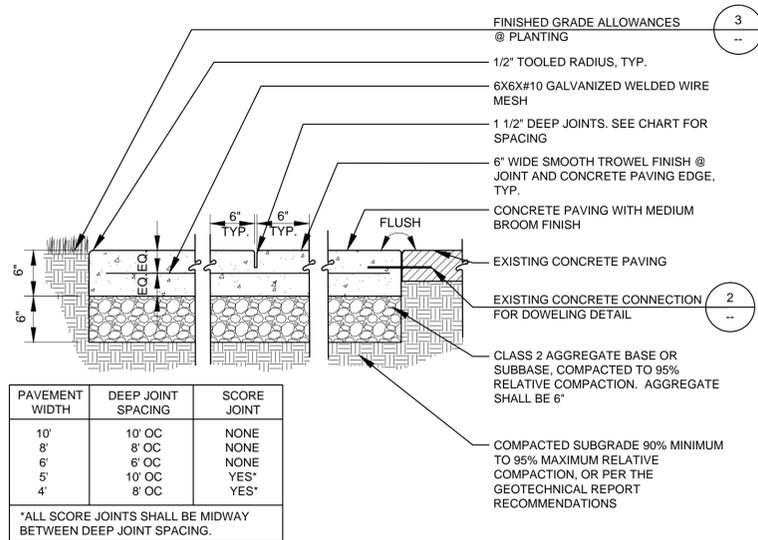


- NOTES:**
- MEDIUM BROOM FINISH PERPENDICULAR TO WALK DIRECTION UNLESS OTHERWISE SHOWN ON PLAN.
  - CROSS SLOPE SHALL BE 1.8% WITH A TOLERANCE OF +/-0.2%, AND NOT EXCEEDING 2% OR FALLING UNDER 1.5%, UNLESS OUTSIDE PATH OF TRAVEL.
  - REFER TO CHART FOR ON-CENTER SPACING OF DEEP JOINTS AND SCORE JOINTS, IF REQUIRED. THE ADJACENT CHART IS A RECOMMENDED GUIDE FOR JOINT PLACEMENT.
  - ALL WELDED WIRE MESH IS TO BE PRE-SET. NO WET SETTING, HOOKING OR LIFTING OF MESH ALLOWED. MESH IS TO BE SET IN THE MIDDLE OF THE CONCRETE SECTION.
  - SCORE JOINTS SHALL BE TOOLED. NO SAWCUTTING ALLOWED.
  - SCORE JOINTS SHALL BE 1/4" WIDE x 1/2" DEEP.
  - WITH THE APPROVAL OF THE CITY LANDSCAPE ARCHITECT, EXPANSION JOINTS MAY OCCUR AT THE JUNCTION BETWEEN FLAT AND VERTICAL CONCRETE SURFACES.


**1 CONCRETE PAVING**  
SCALE: 1" = 1'-0"

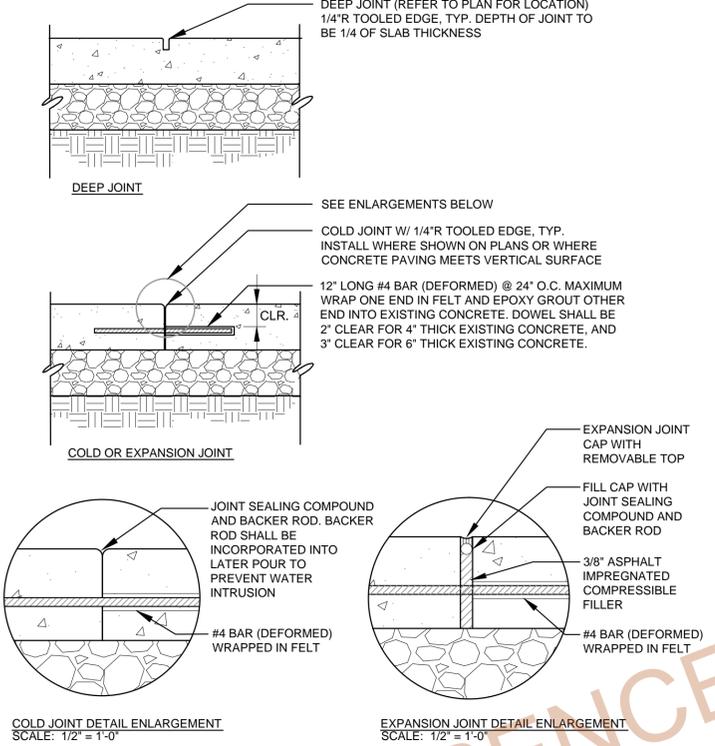

**2 CONCRETE JOINTS**  
SCALE: 1" = 1'-0"

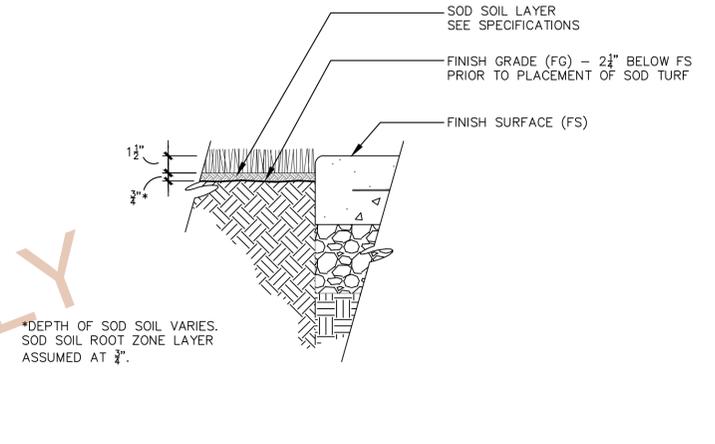


**3 FINISHED GRADE AT SOD AREAS**  
SCALE: 1 1/2" = 1'-0"

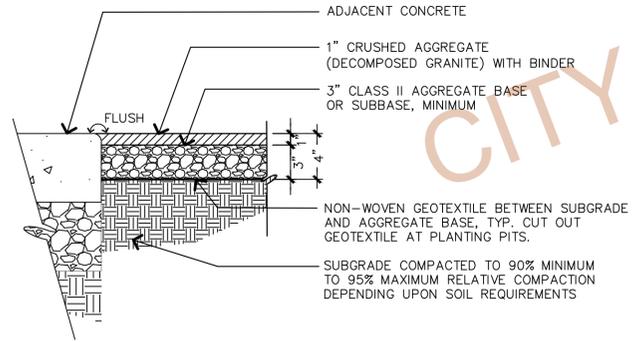


- NOTES:**
- DECOMPOSED GRANITE SHALL BE FLUSH WITH ADJACENT CONCRETE.
  - DECOMPOSED GRANITE SHALL NOT BE INSTALLED ON SLOPES OF 3% OR GREATER.
  - DECOMPOSED GRANITE SHALL BE GOLD IN COLOR.
  - BINDER SHALL BE USED IN ALL DECOMPOSED GRANITE APPLICATIONS AND SHALL BE PRE-MIXED OFF SITE BY THE SUPPLIER. REFER TO SPECIFICATIONS.
  - BINDER SHALL BE A PATENTED, NON-TOXIC ORGANIC BINDER THAT IS A COLORLESS AND ODORLESS CONCENTRATED POWDER THAT BINDS CRUSHED GRAVEL PAVING TO PRODUCE A FIRM SURFACE.

**4 DECOMPOSED GRANITE SURFACING**  
SCALE: 1 1/2" = 1'-0"

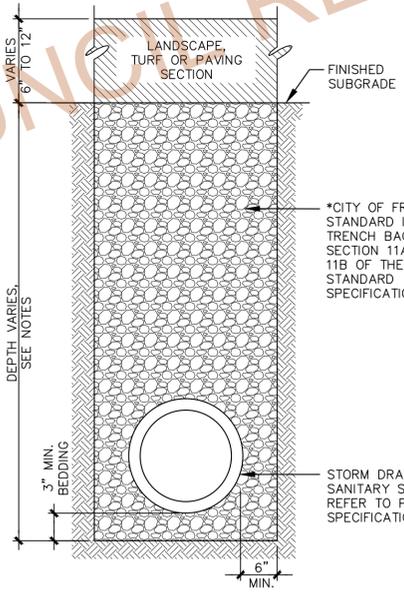

- NOTES:**
- COMPACT TRENCH BACKFILL TO A MINIMUM OF 90% COMPACTION AT NEAR OPTIMUM MOISTURE CONTENT FOR GRANULAR SOILS. SEE CITY STANDARD DETAIL 11A & 11B.
  - IN LANDSCAPED AREAS, THE DEPTH OF LANDSCAPE SECTION BACKFILL ABOVE THE STORM DRAIN LINE SHALL BE 12" MINIMUM FOR PROPOSED PLANTING MEDIUM.
  - THE DEPTH OF CONCRETE AREAS ABOVE THE STORM DRAIN LINE BACKFILL SHALL BE PER THE CONCRETE SECTION DETAILS HEREIN.

**5 STORM DRAIN/SANITARY SEWER LINE**  
SCALE: NTS

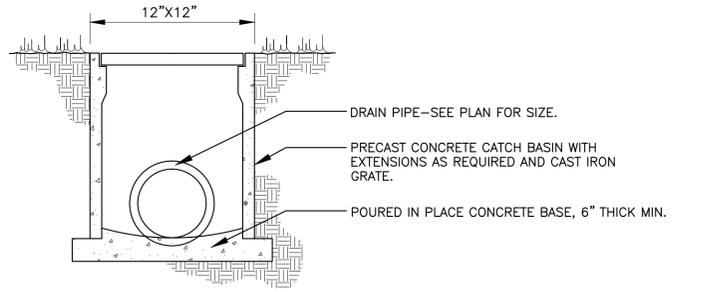

- NOTES:**
- PRECAST CONCRETE CATCH BASIN WITH EXTENSIONS AS REQUIRED. BOX DESIGN LOAD SHALL BE H-20 TRAFFIC RATED WITH A 12 INCH MINIMUM INSIDE MEASUREMENT.
  - CONCRETE SHALL BE 2500 PSI AFTER 28 DAYS.
  - WALLS AND FLOOR SHALL BE REINFORCED WITH 4x4x10 WELDED WIRE MESH. WALLS SHALL BE 4 INCH THICK, MINIMUM.
  - OVERALL MINIMUM WEIGHT SHALL BE 470 LBS.
  - EXTENSION, WHERE REQUIRED OR NEEDED, SHALL BE 12 INCH TALL REINFORCED CONCRETE.
  - RISERS, IF USED, SHALL HAVE A MINIMUM WEIGHT OF 140 LBS.
  - GRATE FRAME SHALL HAVE A MEASUREMENT OF 2"x1 1/2"x1/4" ANGLES AND 2"x3/8" SIDE BARS AND BE CAST INTO RISER OR CATCH BASIN.
  - CAST IRON GRATE SHALL BE H-20 TRAFFIC RATED, "ADA" WHEEL CHAIR PROOF, AND A MINIMUM OF 13 LBS. BANDING BARS SHALL BE AT BOTH ENDS, WITH 3/16" CROSS BARS AT 4" ON CENTER, TYP. BEARING BARS SHALL BE 3/16" AT 19/32" ON CENTER WITH 13/32" CLEAR, WIT CROSS BARS AT 4" ON CENTER.
  - GRATE TO BE LOCKED IN PLACE WITH (2) 3/8" DIAMETER STAINLESS STEEL VANDAL-PROOF BOLTS AS RECOMMENDED BY THE MANUFACTURER. FRAME AND GRATE SHALL BE HOT-DIPPED GALVANIZED AFTER FABRICATION PER ASTM A-123.
  - SET DRAIN BOX 1/4 INTO 16"x16"x4" THICK CONCRETE BASE.
  - CORE OR KNOCK OUT CATCH BASIN AS REQUIRED TO ACCEPT DRAIN PIPES AND SEAL ALL CONNECTIONS.
  - FLOW LINE OF PIPE SHALL BE FLUSH WITH POURED IN PLACE CONCRETE BASE, IF POURED IN PLACE BASE IS USED.

**6 AREA DRAIN**  
SCALE: 1" = 1'-0"


No.	DATE	REVISION	BY	APPD



DRINKING FOUNTAIN REPLACEMENT AND CONNECTION  
CONSTRUCTION DETAILS  
PUBLIC WORKS DEPARTMENT


APPROVED -- SENIOR LANDSCAPE ARCHITECT  
DATE 11-26-2019  
RECOMMENDED -- PROJECT MANAGER  
DATE 11-26-2019

CITY PROJECT: PWC 8769	SCALE: AS SHOWN	DRAWING: <b>L14.0</b>
FEDERAL PROJECT:	0 + + + + + 1'	NOTE: VERIFY SCALE. BAR IS ONE INCH ON ORIGINAL DRAWING. ADJUST SCALES ACCORDINGLY IF BAR IS NOT ONE INCH.
DESIGNED BY: EL	CHECKED BY: MM	
DRAWN BY: EL	DATE: 11-26-2019	SHEET 16 OF 18

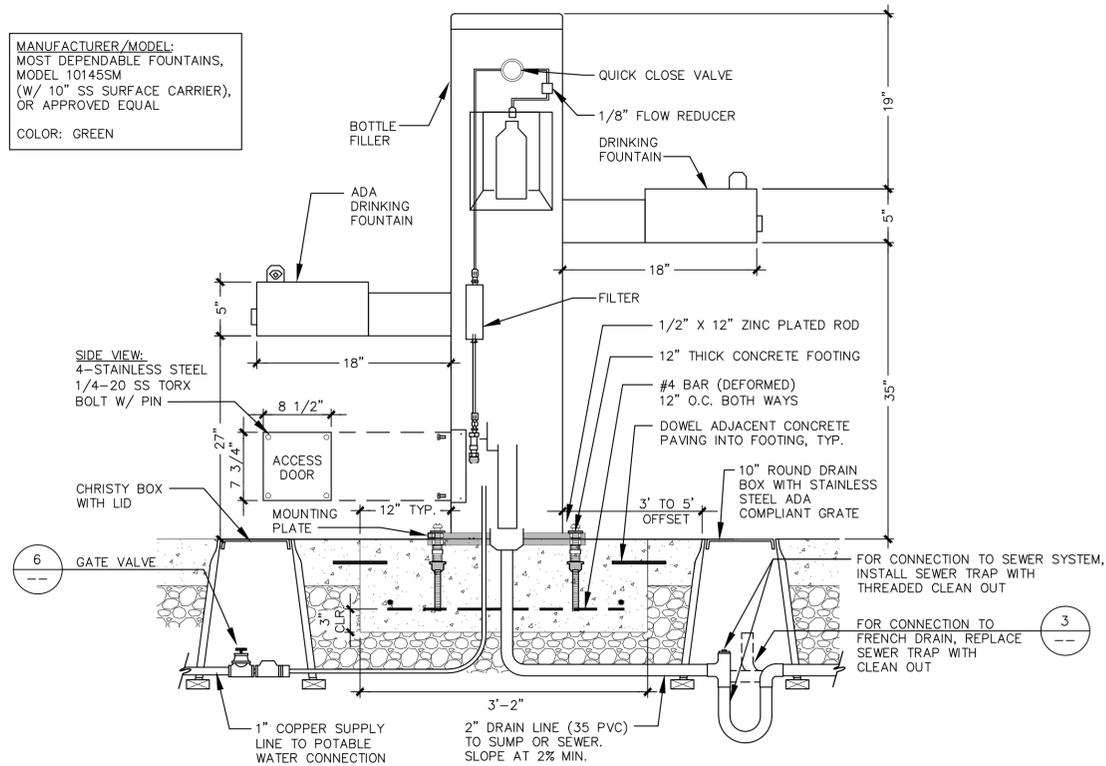


**NOTES:**  
 1. DRINKING FOUNTAIN TO PROVIDE FLOW OF WATER AT LEAST 4" HIGH TO ALLOW INSERTION OF CUP OR GLASS UNDER FLOW OF WATER.  
 2. INSTALL WATER AND WASTE CONNECTIONS PER MANUFACTURER'S SPECIFICATIONS.  
 3. INSTALL ADDITIONAL GATE VALVE AT THE POINT OF CONNECTION, IF GREATER THAN 10 FEET WAY, TO CONTROL ON/OFF OF FLOW CLOSER TO THE SOURCE.  
 4. CLEAN OUT AND P-TRAP SHALL BE INSTALLED TO THE INVERT DEPTHS AS DESCRIBED ON THE PLANS.  
 5. SURROUNDING CONCRETE SHALL BE SLOPED TO DRAIN, NOT TO EXCEED 2% IN ANY DIRECTION.

**1 DRINKING FOUNTAIN**  
 SCALE: 1"=1'-0"

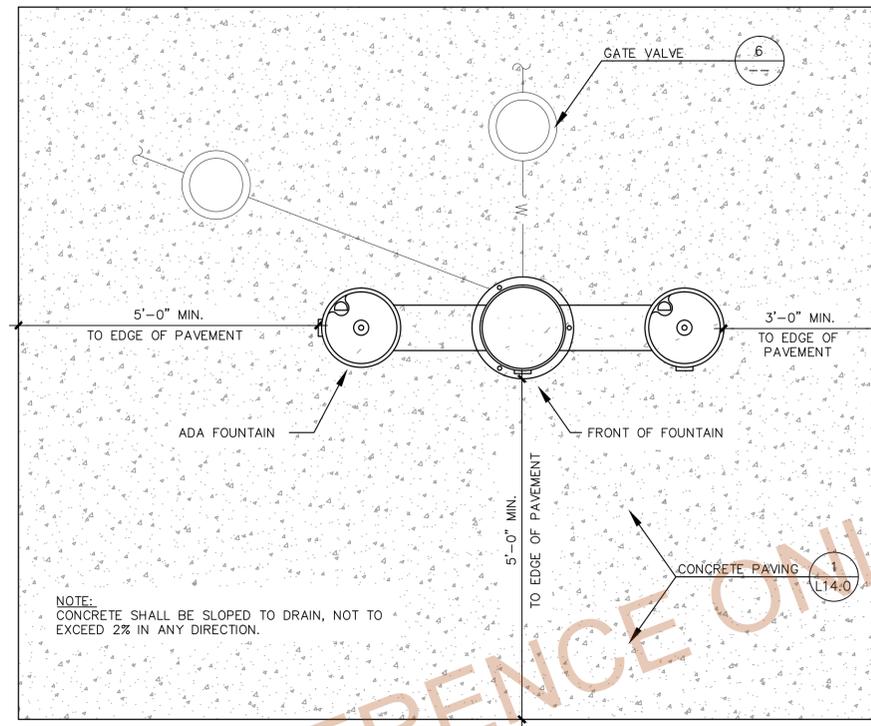


**2 DRINKING FOUNTAIN LAYOUT**  
 SCALE: N.T.S.


**NOTES:**  
 1. ALL SCHEDULE 40 PIPE AND JOINTS SHALL BE SOLVENT WELDED BEFORE BACKFILLING.  
 2. WHEN BOX IS PLACED IN CONCRETE PAVING, THE BOX SHALL BE OFFSET 12 INCHES MINIMUM THE NEAREST CONCRETE EDGE, WALL, CURB OR COLUMN.  
 3. WHEN BOX IS PLACED IN LANDSCAPE, THE BOX SHALL BE OFFSET 12 INCHES MINIMUM FROM THE NEAREST CONCRETE EDGE, WALL, CURB OR COLUMN.  
 4. IN LANDSCAPE AREAS, 10" DIAMETER PLASTIC VALVE BOX WITH PLASTIC LID, SECURE LID WITH 3/8" DIAMETER STAINLESS STEEL MACHINE BOLT AS COORDINATED VALVE BOX WITH H20 TRAFFIC RATED, EXCEPT FOR SOCCER FIELD RESTROOM #1 - BOX SHALL BE CONCRETE PER NOTE #5.  
 5. IN CONCRETE PAVING: 10" DIAMETER CONCRETE VALVE BOX WITH H20 TRAFFIC RATED CONCRETE LID, SECURED AND STAMPED AS DESCRIBED IN NOTE #4 ABOVE.

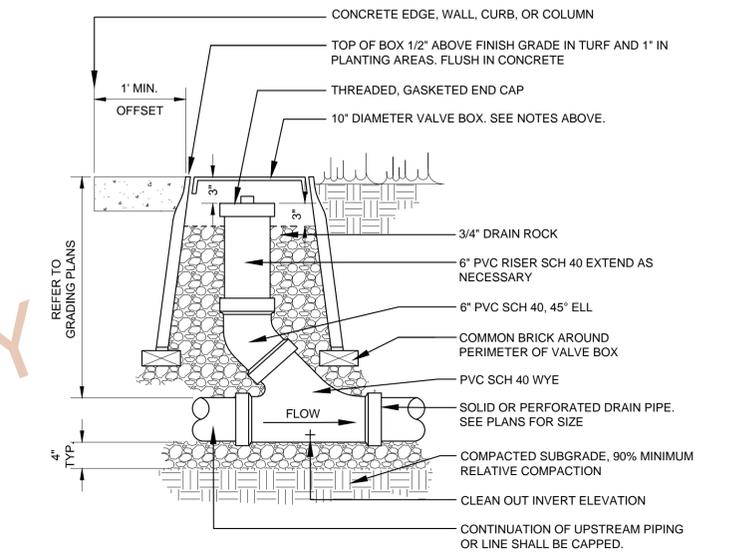


**3 CLEAN OUT**  
 SCALE: 1"=1'-0"

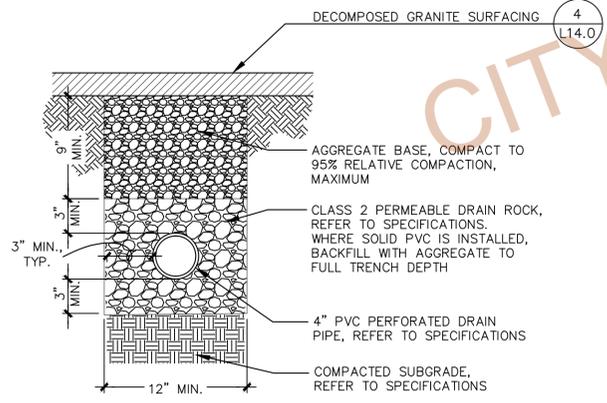

**4 FRENCH DRAIN AT DECOMPOSED GRANITE**  
 SCALE: NTS

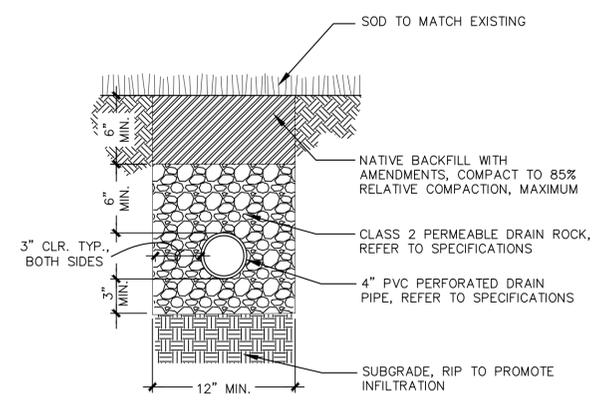

**5 FRENCH DRAIN AT LAWN AREA**  
 SCALE: NTS

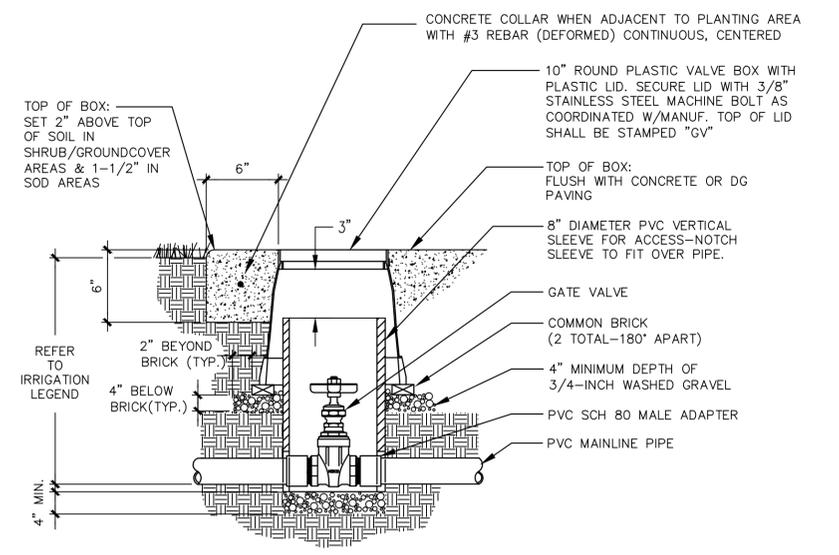

**6 GATE VALVE**  
 N.T.S.

No.	DATE	REVISION	BY	APPD

**CITY OF Fremont**

APPROVED -- SENIOR LANDSCAPE ARCHITECT

**DRINKING FOUNTAIN REPLACEMENT AND CONNECTION**

**CONSTRUCTION DETAILS**

**PUBLIC WORKS DEPARTMENT**

CITY PROJECT: PWC 8769

FEDERAL PROJECT:

DESIGNED BY: EL

CHECKED BY: MM

DRAWN BY: EL

DATE: 11-26-2019


SCALE: AS SHOWN

0 +-----+ 1'

NOTE: VERIFY SCALE. BAR IS ONE INCH ON ORIGINAL DRAWING. ADJUST SCALES ACCORDINGLY IF BAR IS NOT ONE INCH.

**L14.1**

SHEET 17 OF 18

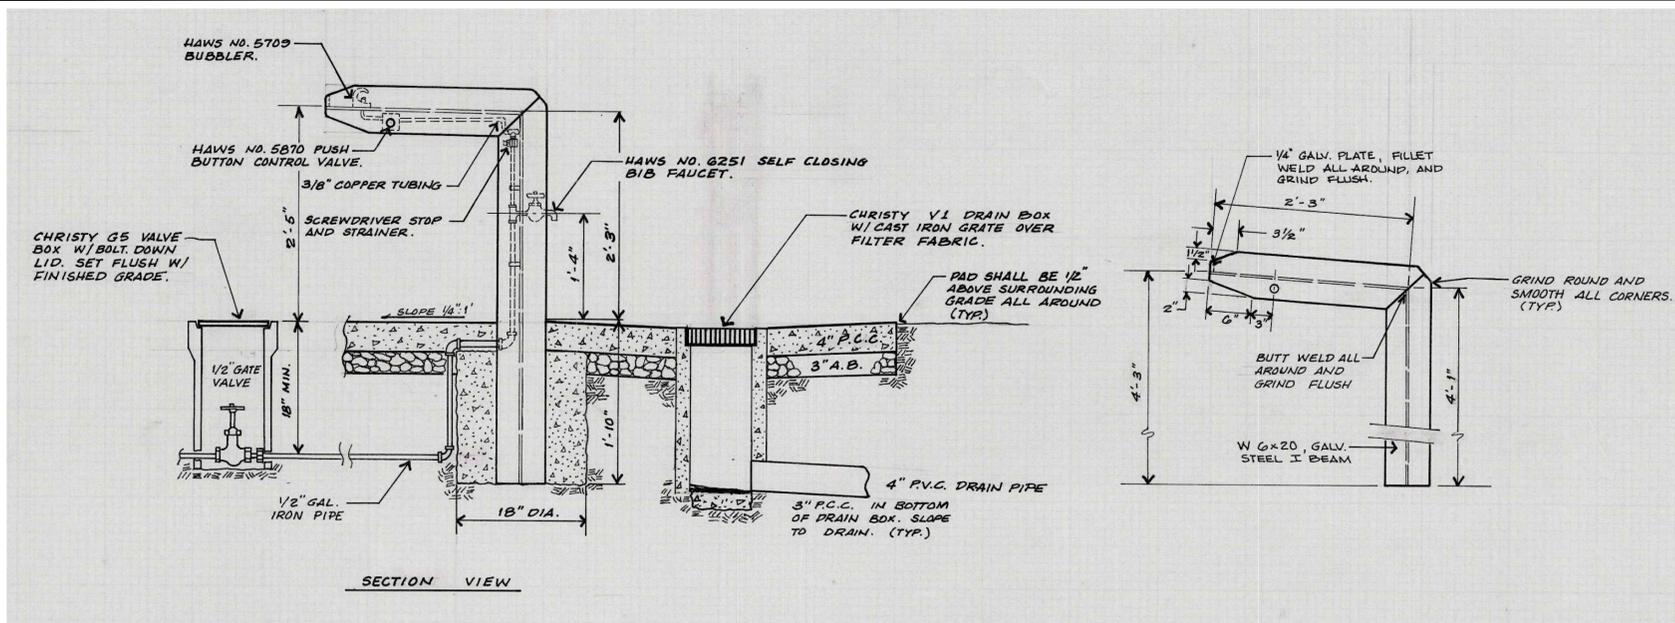


**1** EXISTING FOUNTAIN INSTALLATION - FOR REFERENCE ONLY  
 SCALE: N.T.S.

CITY COUNCIL REFERENCE ONLY


No.	DATE	REVISION	BY	APPD
△				
△				
△				
△				



 <b>CITY OF Fremont</b> APPROVED -- SENIOR LANDSCAPE ARCHITECT <i>Mark...</i>		<b>DRINKING FOUNTAIN REPLACEMENT AND CONNECTION</b> <b>CONSTRUCTION DETAILS</b> <b>PUBLIC WORKS DEPARTMENT</b>		CITY PROJECT: PWC 8769	SCALE: AS SHOWN	DRAWING: <b>L14.2</b>
		DATE 11-26-2019	RECOMMENDED -- PROJECT MANAGER <i>...</i>	DATE 11-26-2019	DESIGNED BY: EL	CHECKED BY: MM
				DRAWN BY: EL	DATE: 11-26-2019	NOTE: VERIFY SCALE. BAR IS ONE INCH ON ORIGINAL DRAWING. ADJUST SCALES ACCORDINGLY IF BAR IS NOT ONE INCH.
						SHEET 18 OF 18

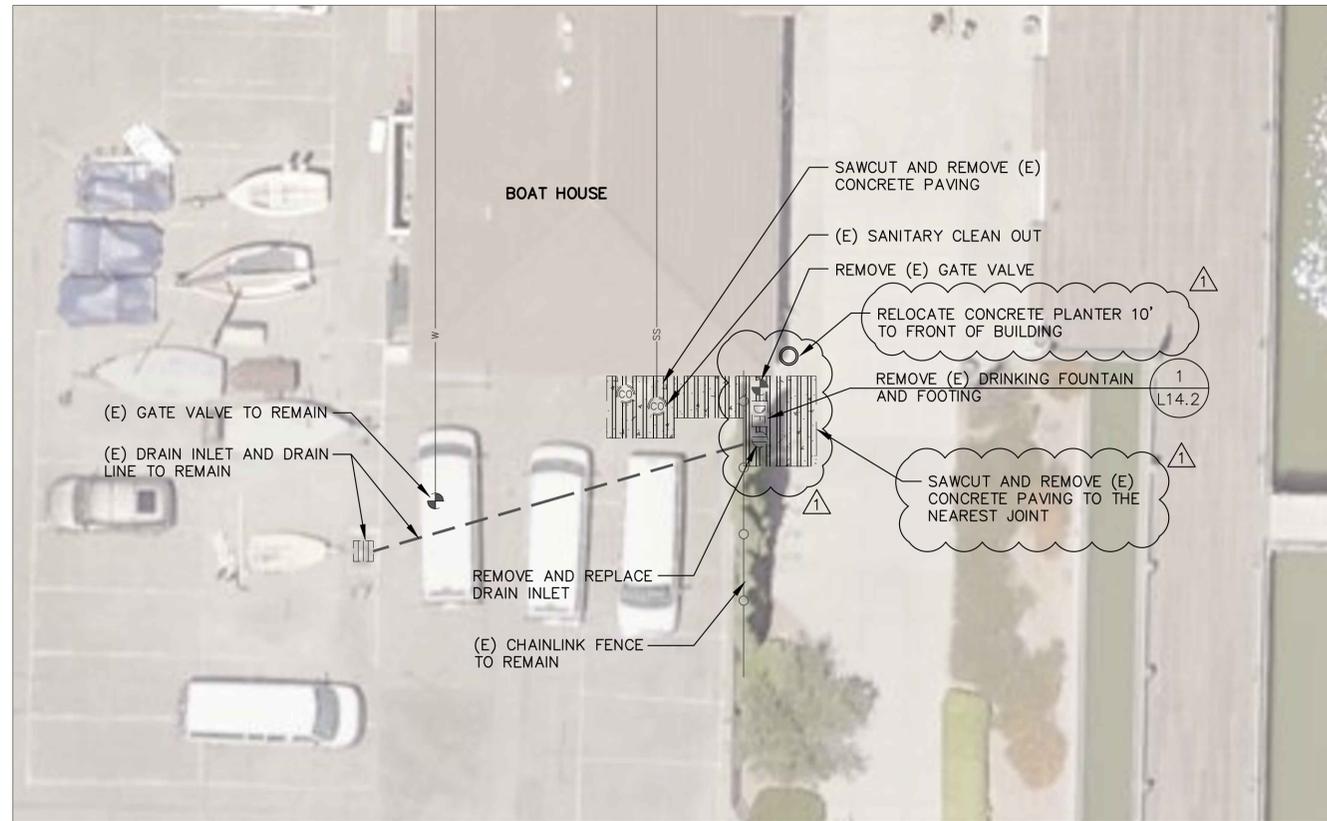

EXISTING CONDITION/DEMOLITION PLAN

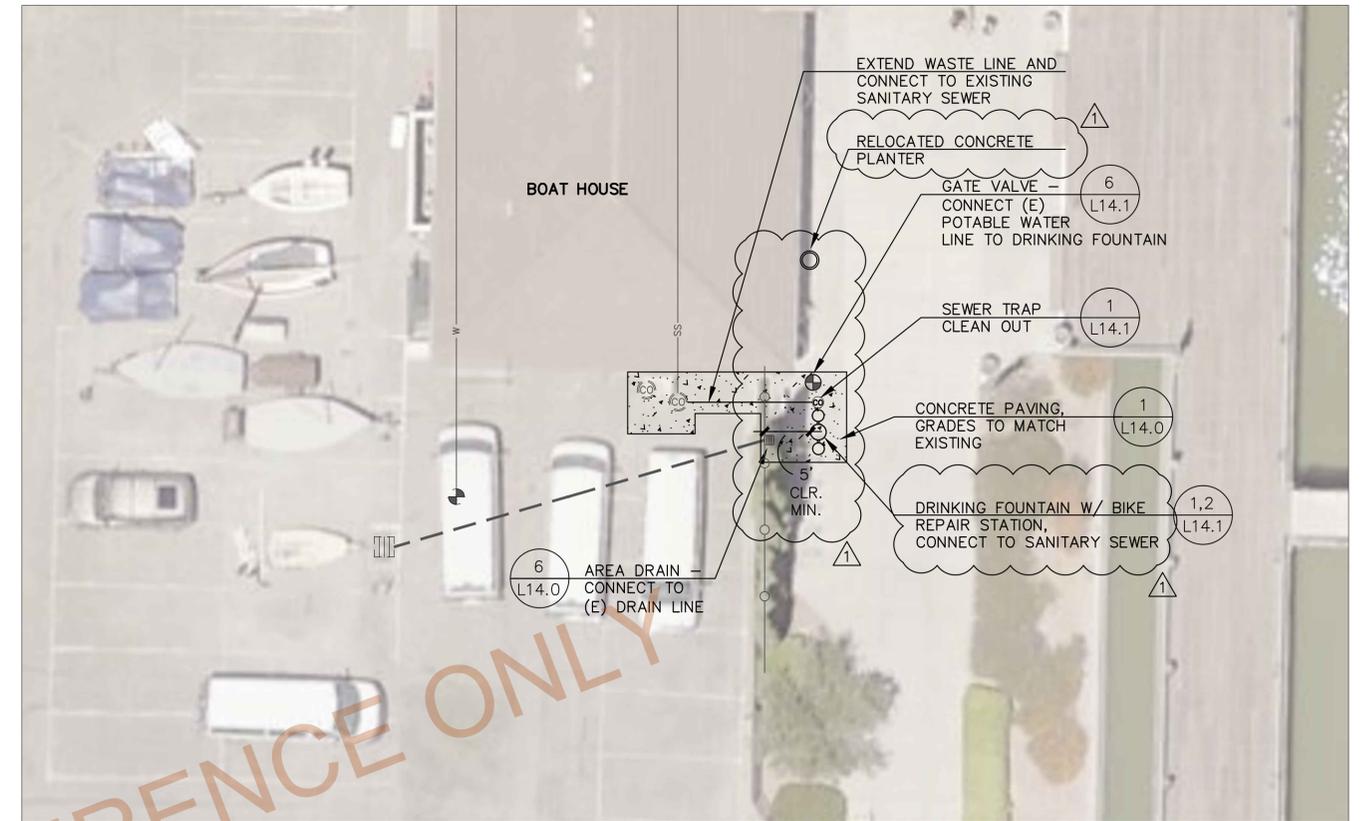

IMPROVEMENT PLAN

LEGEND:

	TEMPORARY CONSTRUCTION FENCING
	REMOVE CONCRETE AND ASPHALT PAVING TO SUBGRADE
	(E) DRINKING FOUNTAIN
	(E) SANITARY SEWER CLEAN OUT
	(E) GATE VALVE
	(E) DRAIN INLET
	(E) SANITARY SEWER
	(E) POTABLE WATER
	(E) PVC DRAIN LINE
	(N) PERFORATED PVC PIPE
	(N) DRINKING FOUNTAIN
	(N) GATE VALVE
	(N) CLEAN OUT
	(N) CONCRETE PAVING

NOTES:

1. THE CONTRACTOR SHALL VERIFY THAT EXISTING CONDITIONS ARE AS INDICATED ON THE DRAWINGS. NOTIFY THE CITY REPRESENTATIVE OF VARIATIONS OR DISCREPANCIES. DO NOT PROCEED WITH AFFECTED WORK UNTIL THE VARIATIONS OR DISCREPANCIES ARE RESOLVED.
2. THE CONTRACTOR SHALL PERFORM ALL CLEARING, DEMOLITION, REMOVAL OF OBSTRUCTIONS AND SITE PREPARATION NECESSARY FOR THE PROPER EXECUTION OF ALL WORK CONTAINED IN THE CONTRACT DOCUMENTS.
3. THE CONTRACTOR SHALL VERIFY LOCATION OF ALL EXISTING UTILITIES AND PROVIDE THE REQUIRED COORDINATION FOR THEIR TEMPORARY DISCONNECTION, PROTECTION, AND REMOVAL AS MAY BE REQUIRED DURING CONSTRUCTION. CONTRACTOR SHALL COORDINATE WITH THE CITY TO DETERMINE WHETHER TEMPORARY SERVICES ARE NECESSARY. THE CONTRACTOR SHALL VERIFY THE LOCATIONS OF ALL EXISTING UTILITIES, STRUCTURES AND SERVICES BEFORE COMMENCING WORK. THE LOCATIONS AND ALIGNMENTS OF EXISTING UTILITIES, STRUCTURES AND SERVICES SHOWN ON THE DRAWINGS SHALL BE DEEMED TO BE APPROXIMATION ONLY. THE CONTRACTOR SHALL VERIFY THE LOCATIONS AND DEPTH OF UTILITIES THROUGH UNDERGROUND SERVICE ALERT (USA), POTHOLING OR OTHER METHODS. ALL DISCREPANCIES BETWEEN WHAT IS SHOWN AND THE ACTUAL FIELD CONDITIONS SHALL BE REPORTED TO THE CITY REPRESENTATIVE.
4. ALL REFERENCE MARKINGS MADE BY THE CONTRACTOR SHALL BE DONE WITH SPRAY CHALK, AND SHALL BE REMOVED BY THE CONTRACTOR WHEN NO LONGER NEEDED.
5. ALL EXISTING FEATURES ARE TO REMAIN UNLESS OTHERWISE NOTED. THE CONTRACTOR SHALL BE RESPONSIBLE FOR REPAIRING OR REPLACING, AT THE CONTRACTOR'S EXPENSE, ANY EXISTING ITEM DAMAGED OR DESTROYED BY CONSTRUCTION OPERATIONS. CONTRACTOR SHALL BE RESPONSIBLE FOR REPAIRING OR REPLACING ANY AND ALL DAMAGES TO ADJACENT PROPERTIES. THE DAMAGED ITEMS SHALL BE RESTORED TO AN "AS-WAS" OR BETTER CONDITION OR REPLACED PER THE DISCRETION OF THE CITY REPRESENTATIVE.
6. NO MATERIALS OR EQUIPMENT SHALL BE STORED WITHIN THE CANOPY DRIPLINE OF EXISTING TREES.
7. ALL EXISTING TREES, LAWN AND OTHER PLANTING LOCATED OUTSIDE THE LIMIT OR WORK AREA SHALL BE PRESERVED, AND REMAIN AND BE PROTECTED.

No.	DATE	REVISION	BY	APPD
△	12/16/2019	ADDENDUM 1	EL	MM
△				
△				
△				



**DRINKING FOUNTAIN REPLACEMENT AND CONNECTION**

**CENTRAL PARK - BOAT HOUSE**

**PUBLIC WORKS DEPARTMENT**

APPROVED -- SENIOR LANDSCAPE ARCHITECT	DATE 11-26-2019	RECOMMENDED -- PROJECT MANAGER	DATE 11-26-2019
--	-----------------	--------------------------------	-----------------

CITY PROJECT: PWC 8769	SCALE: 1"=10'-0"	DRAWING: <b>L11.0</b>
FEDERAL PROJECT:	0 1' 1"	
DESIGNED BY: EL	CHECKED BY: MM	NOTE: VERIFY SCALE. BAR IS ONE INCH ON ORIGINAL DRAWING. ADJUST SCALES ACCORDINGLY IF BAR IS NOT ONE INCH.
DRAWN BY: EL	DATE: 11-26-2019	

SHEET 13 OF 18