
## NOTES:

- 1. CURRENT STANDARD DETAIL AT CITY ENGINEERING DIVISION SHALL PREVAIL.
- 2. CROWN TO BE ROUNDED WITH NO SHARP GRADE BREAKS.
- 3. MINIMIZE VISIBLE EXPOSED GROUT AT COBBLE JOINTS.
- 4. SURFACE OF COBBLE FIELD TO BE SMOOTH AND FLAT TO GRADE WITHOUT VARIATION IN HEIGHT OF INDIVIDUAL COBBLES.
- 5. COBBLES WITH BREAKS OR FRACTURES ARE NOT ALLOWED.
- 6. ROCK SHALL BE 'SATURATED SURFACE MOIST' (SSM) PRIOR TO PLACEMENT.
- 7. CONCRETE BED SHALL HAVE A CEMENT RATIO PER CUBIC YARD OF CONCRETE OF NOT LESS THAN 564 POUNDS; SLUMP MAX. OF 3"; AGGREGATE SIZE ½" MAXIMUM.
- 8. INTEGRAL COLOR ADMIXTURE: COLOR 641-YOSEMITE BROWN, BY DAVIS COLOR, C-21 CHROMIX G & L ADMIXTURE, BY SCOFIELD, OR APPROVED EQUAL. ADMIXTURE CAN BE GRANULAR (G), LIQUID (L), OR POWDERED (P).

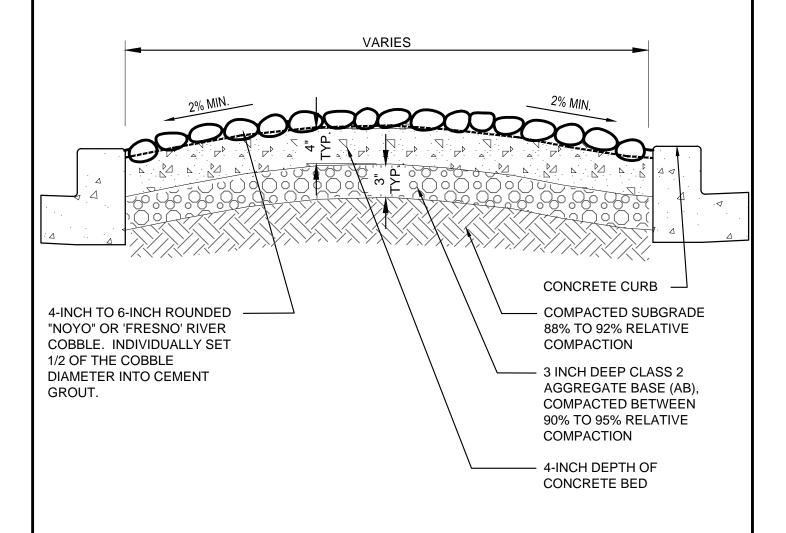

			~	Y OF			DATE APPROVED BY CITY COUNCIL 12/13/1	="
Take	General Revision	07/31/22	STANDARD DETAILS				RESOLUTION NO. 2006-31	
Jak	General Revision	08/2019	CITY STANDARD				26 26	,
APPR	REVISED	DATE	MEDIAN PAVING COBBLE				Nam Hughen	
REVISIONS			WEBI/(INT/(VIING GOBBEE				CITY ENGINEER	
FILE NO. LSD-7.DWG		SCALE 1" = 1	'-0"	DRAWN PM/MM	CHECKED RER	DATE 10/07/2005	DWG NO. LSD-7	1 of 1